

3kW FAN COOLED

AC-DC POWER SUPPLIES

The 3 phase XTL30 fleXPower series is a modular power supply which can be configured into a bespoke solution for quick delivery of samples, prototypes and low volume production with up to 3000 Watts of output power. Configurations may comprise of up to 7 modules chosen from 44 single output modules and 16 dual output modules ranging from 3.3V at 66W to 60V at 750W. Modules may be combined in series or parallel to create a single output at the chassis power rating. Modules of unlike power can be paralleled and will current share within 10%.


Opto-isolation of control and monitoring signals provides further configuration flexibility, including a global Inhibit/Enable function. A continuous 5V/2A housekeeping output is present when the AC supply is active. The XTL30 fleXPower consists of a chassis in which there are 20 slots, allowing for up to 10 individual modules. A single phase input version is available, see fleXPower datasheet for details.



Features

- Configurable for fast time to market
- Flexible series and parallel capability
- EN62368-1 and UL62368 safety approvals
- 3 phase input 180 to 264VAC
- 1-20 outputs
- Variable speed fan (optional)
- Fully featured signals and controls
- -20°C to +70°C operating temperature
- 3 year warranty

Applications

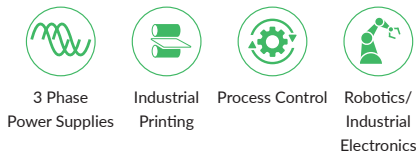

Dimensions



317.5 x 127.0 x 127.0 mm (12.50 x 5.00 x 5.00")

Summary

| Characteristic | Minimum | Typical | Maximum | Units | Notes & Conditions |
|-----------------------|---------|---------|---------|---------|--------------------|
| Output Power Rating | | | 3000 | W | |
| Power Factor | 0.93 | | | Hz | |
| Efficiency | | 88 | | % | |
| Operating Temperature | -20 | | +70 | °C | |
| Output Ripple & Noise | | 1 | | % pk-pk | |
| Hold Up Time | 20 | | | ms | |
| Housekeeping/Standby | | 5/2 | | V/A | |

Configuration

The XTL30 fleXPower range allows for simple configuration of a custom modular power supply with up to ten outputs. The chassis consists of twenty slots, and modules are either two, three or four slots wide.

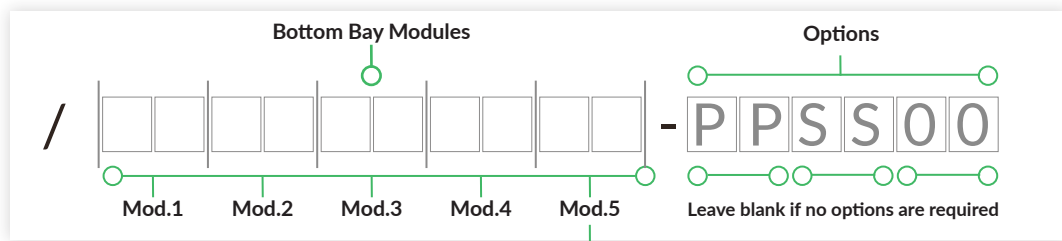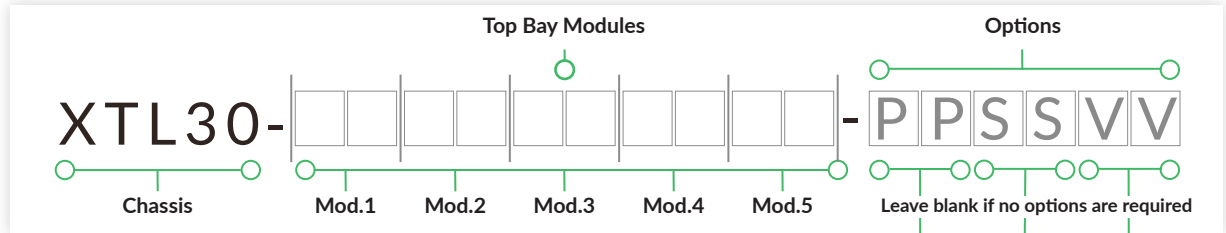

| Parallel Option Codes "P" | |
|---------------------------|----------------------|
| Code | Description |
| 00 | No parallel required |
| 12 | Modules 1 & 2 |
| 13 | Modules 1 to 3 |
| 14 | Modules 1 to 4 |
| 23 | Modules 2 & 3 |
| 24 | Modules 2 to 4 |
| 25 | Modules 2 to 5 |
| 34 | Modules 3 & 4 |
| 35 | Modules 3 to 5 |
| 40 | Modules 1 & 2, 3 & 4 |

| Series Option Codes "S" | |
|-------------------------|----------------------|
| Code | Description |
| 00 | No series required |
| 12 | Modules 1 & 2 |
| 13 | Modules 1 to 3 |
| 23 | Modules 2 & 3 |
| 24 | Modules 2 to 4 |
| 40 | Modules 1 & 2, 3 & 4 |

| Other Option Codes "O" | |
|------------------------|----------------------------|
| Code | Description |
| 01 | Reverse Air |
| 02 | Global Enable - Logic 1 |
| 03 | Option 01 & 02 |
| 04 | Global DC OK - Logic 1 |
| 05 | Option 01 & 04 |
| 06 | Option 02 & 04 |
| 07 | Option 01, 02 & 04 |
| 08 | AC OK - Logic 1 |
| 09 | Option 01 & 08 |
| 10 | Option 02 & 08 |
| 11 | Option 01, 02 & 08 |
| 12 | Option 04 & 08 |
| 13 | Option 01, 04 & 08 |
| 14 | Option 02, 04 & 08 |
| 15 | Option 01, 02, 04 & 08 |
| 16 | Fan Speed Control |
| 17 | Option 01 & 16 |
| 18 | Option 02 & 16 |
| 19 | Option 04 & 16 |
| 20 | Option 08 & 16 |
| 21 | Option 01, 02 & 16 |
| 22 | Option 01, 04 & 16 |
| 23 | Option 01, 08 & 16 |
| 24 | Option 02, 04 & 16 |
| 25 | Option 02, 08 & 16 |
| 26 | Option 04, 08 & 16 |
| 27 | Option 01, 02, 04 & 16 |
| 28 | Option 01, 02, 08 & 16 |
| 29 | Option 02, 04, 08 & 16 |
| 30 | Option 01, 02, 04, 08 & 16 |

Step 1

XTL30 can accommodate up to ten modules, resulting in an extensive range of output combinations. However, as all modules are designed to fit across either 2, 3 or 4 slots in the chassis, configuration is very simple. Select the appropriate modules for your output requirements, ensuring that all modules will fit in the chassis. First, insert 7 or 4 series modules, ordered lowest voltage to highest. Next in order, insert 3 series modules, ordered lowest voltage to highest. Follow with 2 series, then 5 series dual output, ordered alphabetically A-Z. Then 1 series, ordered lowest voltage to highest.

Step 2

Add any required options. These are grouped into three types; parallel options, series options and other options. The standard signal set for each chassis includes Global Inhibit, Global DC OK and Global AC OK, each having logic 0 operation. Optionally a logic 1 operating version of each is available along with reverse air flow.

| Dual Output - Module Voltage/Current Rating | | | | | |
|---|---------|----------|---------|-------|------|
| Output 1 | | Output 2 | | Slots | Code |
| Voltage | Current | Voltage | Current | | |
| 5.0V | 10.0A | 5.0V | 10.0A | 2 | 5A |
| 5.0V | 10.0A | 3.3V | 10.0A | 2 | 5B |
| 12.0V | 10.0A | 12.0V | 8.0A | 2 | 5D |
| 15.0V | 8.0A | 15.0V | 6.0A | 2 | 5E |
| 15.0V | 8.0A | 15.0V | 6.0A | 2 | 6E* |
| 15.0V | 8.0A | 12.0V | 8.0A | 2 | 5F |
| 12.0V | 10.0A | 5.0V | 10.0A | 2 | 5G |
| 12.0V | 10.0A | 3.3V | 10.0A | 2 | 5H |
| 12.0V | 10.0A | 2.0V | 10.0A | 2 | 5J |
| 15.0V | 10.0A | 5.0V | 10.0A | 2 | 5K |
| 15.0V | 10.0A | 3.3V | 10.0A | 2 | 5L |
| 15.0V | 10.0A | 2.0V | 10.0A | 2 | 5M |
| 24.0V | 6.0A | 5.0V | 10.0A | 2 | 5N |
| 24.0V | 6.0A | 5.0V | 10.0A | 2 | 6N* |
| 24.0V | 6.0A | 3.3V | 10.0A | 2 | 5P |
| 24.0V | 6.0A | 2.0V | 10.0A | 2 | 5Q |

Total power for dual output module must not exceed 175W max. 5 series modules require 10% load on output 1 to meet specified regulation on output 2.


*No minimum load needed on output 1 for regulation.

| Single Output - Module Voltage/Current Rating | | | | | | |
|---|---------|-----------------|-------|-----------------|-------|-------------------|
| Voltage | Current | l _{pk} | Power | P _{pk} | Slots | Code |
| 3.3V | 20.0A | n/a | 66W | n/a | 2 | 1C |
| 3.3V | 40.0A | n/a | 132W | n/a | 2 | 2C |
| 3.3V | 60.0A | n/a | 198W | n/a | 3 | 3C |
| 5.0V | 20.0A | n/a | 100W | n/a | 2 | 1D |
| 5.0V | 40.0A | n/a | 200W | n/a | 2 | 2D |
| 5.0V | 60.0A | n/a | 300W | n/a | 3 | 3D |
| 8.0V | 25.0A | n/a | 200W | n/a | 2 | 2H |
| 10.0V | 20.0A | n/a | 200W | n/a | 2 | 2I |
| 10.0V | 30.0A | n/a | 300W | n/a | 3 | 3I |
| 12.0V | 8.50A | n/a | 102W | n/a | 2 | 1J |
| 12.0V | 17.0A | n/a | 204W | n/a | 2 | 2J |
| 12.0V | 25.0A | n/a | 300W | n/a | 3 | 3J |
| 12.0V | 62.5A | n/a | 750W | n/a | 4 | 4J ⁽²⁾ |
| 15.0V | 7.00A | n/a | 105W | n/a | 2 | 1L |
| 15.0V | 14.0A | n/a | 210W | n/a | 2 | 2L |
| 15.0V | 20.0A | n/a | 300W | n/a | 3 | 3L |
| 15.0V | 50.0A | n/a | 750W | n/a | 4 | 4L ⁽²⁾ |
| 15.0V | 50.0A | n/a | 750W | n/a | 4 | 7L |
| 18.0V | 16.7A | n/a | 300W | n/a | 3 | 3N |
| 24.0V | 5.00A | n/a | 120W | n/a | 2 | 1P |
| 24.0V | 10.5A | n/a | 252W | n/a | 2 | 2P |
| 24.0V | 17.0A | n/a | 408W | n/a | 3 | 3P |
| 24.0V | 31.5A | n/a | 750W | n/a | 4 | 4P ⁽²⁾ |
| 24.0V | 31.5A | n/a | 750W | n/a | 4 | 7P |
| 24.0V | 5.00A | 10.0A | 120W | 240W | 2 | 1R ⁽¹⁾ |
| 24.0V | 10.5A | 21.0A | 252W | 504W | 2 | 2R ⁽¹⁾ |
| 24.0V | 17.0A | 34.0A | 408W | 816W | 3 | 3R ⁽¹⁾ |
| 28.0V | 4.50A | n/a | 126W | n/a | 2 | 1Q |
| 28.0V | 9.00A | n/a | 252W | n/a | 2 | 2Q |
| 28.0V | 14.0A | n/a | 392W | n/a | 3 | 3Q |
| 28.0V | 26.8A | n/a | 750W | n/a | 4 | 4Q ⁽²⁾ |
| 28.0V | 26.8A | n/a | 750W | n/a | 4 | 7Q |
| 30.0V | 8.4A | n/a | 252W | n/a | 2 | 2S |
| 30.0V | 13.5A | n/a | 405W | n/a | 3 | 3S |
| 36.0V | 3.50A | n/a | 126W | n/a | 2 | 1U |
| 36.0V | 7.00A | n/a | 252W | n/a | 2 | 2U |
| 36.0V | 11.0A | n/a | 396W | n/a | 3 | 3U |
| 36.0V | 21.0A | n/a | 750W | n/a | 4 | 4U ⁽²⁾ |
| 36.0V | 21.0A | n/a | 750W | n/a | 4 | 7U |
| 42.0V | 9.05A | n/a | 400W | n/a | 3 | 3V |
| 48.0V | 2.50A | n/a | 120W | n/a | 2 | 1W |
| 48.0V | 5.20A | n/a | 249W | n/a | 2 | 2W |
| 48.0V | 8.50A | n/a | 408W | n/a | 3 | 3W |
| 48.0V | 15.7A | n/a | 750W | n/a | 4 | 4W ⁽²⁾ |
| 48.0V | 15.7A | n/a | 750W | n/a | 4 | 7W |
| 60.0V | 2.00A | n/a | 120W | n/a | 2 | 1Y |
| 60.0V | 4.20A | n/a | 252W | n/a | 2 | 2Y |
| 60.0V | 7.00A | n/a | 420W | n/a | 3 | 3Y |
| 60.0V | 12.5A | n/a | 750W | n/a | 4 | 4Y ⁽²⁾ |
| 60.0V | 12.5A | n/a | 750W | n/a | 4 | 7Y |

1. Peak power available for 10 seconds with 35% duty cycle, if peak power rating is exceeded output may latch, recycle input to reset.
2. '4' series modules not recommended for new designs.

1. Fancard options 16-30 will occupy 2 slots. See mechanical drawing, page 8.

Configuration Examples

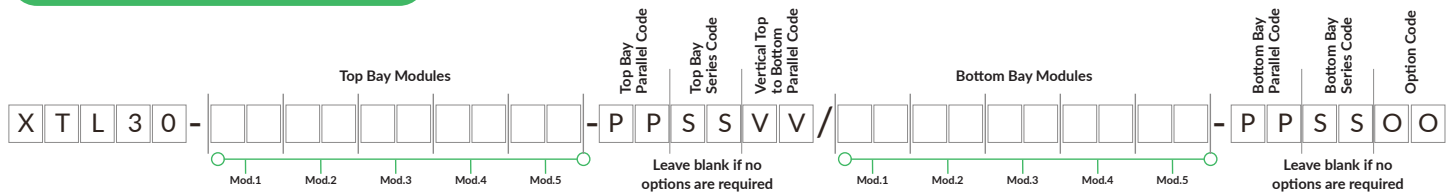

- Configuration for XTL30 is Chassis - Top Bay - Options Bottom Bay - Options
- Maximum 1500W for each bay, power to be evenly distributed between top and bottom bays.
- Option codes within each bay are listed in the modules table.
- The fan control card is mounted in the bottom bay, as standard. Contact sales for alternative location.
- 1st and 2nd digits = parallel like voltages, including vertical parallel.
- 3rd and 4th digits = series option designation.
- 5th and 6th digits = other option codes. (5th and 6th digits fan card options 16 to 30 is called out for one bay only, either top or bottom).

| Vertical Parallel Option Codes "V" | |
|------------------------------------|--|
| Code | Description |
| 61 | Parallel module 1 to module 1 top & bottom |
| 62 | Parallel module 2 to module 2 top & bottom |
| 63 | Parallel module 3 to module 3 top & bottom |
| 64 | Parallel module 4 to module 4 top & bottom |
| 65 | Parallel module 5 to module 5 top & bottom |

Examples


-5V at 200A, 24V at 10.5A, 48V at 5.2A, 12V at 10A, 2V at 10A, with fan speed control

XTL30 - 3000W industrial 3ø chassis, 20 module slots available.

XTL30-3D2D2P5J-61/3D2D2W-120016

3D - 5 V @ 60.0 A. Three slot width module.
 2D - 5 V @ 40.0 A. Two slot width module.
 2P - 24 V @ 10.5 A. Two slot width module.
 5J - 12 V @ 10.0 A. Two slot width module.
 61 - Vertical parallel module 1 top bay to module 1 bottom bay.

3D - 5 V @ 60.0 A. Three slot width module.
 2D - 5 V @ 40.0 A. Two slot width module.
 2W - 48 V @ 5.2 A. Two slot width module.
 12 - Parallel modules 1 and 2, bottom bay.
 00 - No series option.
 16 - Fan speed control card.

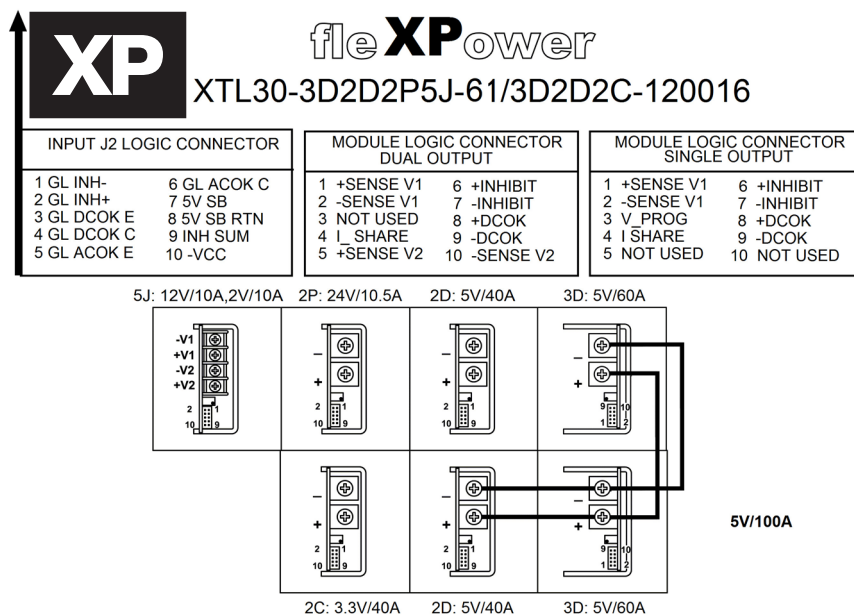

Input

| Characteristic | Minimum | Typical | Maximum | Units | Notes & Conditions |
|---------------------------|--|---------|---------|-------|---|
| Input Voltage - Operating | 180 | | 264 | VAC | 4 wire 3 phase (no neutral), 300VAC, 5s |
| Input Frequency | 47 | | 63 | Hz | |
| Power Factor | 0.93 | | | | |
| Input Current - per phase | | 12 | | A | 180VAC |
| | | 9 | | | 264VAC |
| Inrush Current | | | 60 | A | Cold start 25°C at 264VAC |
| Earth Leakage Current | | | 1 | mA | at 264VAC, 60Hz/<3.5mA single fault |
| Input Protection | T30A/250V internal fuse fitted in line | | | | |

Output

| Characteristic | Minimum | Typical | Maximum | Units | Notes & Conditions |
|----------------------------|---|---------|---------|------------|--|
| Output Voltage | 3.3 | | 60 | VDC | See Modules table |
| Output Voltage Adjustment | | | | % | See Modules table |
| Minimum Load | No minimum load required for 2 slot, 3 slot or 4 slot single output or 6 x dual output modules. 5x dual outputs require 10% load on V1 to meet specified regulation on V2 | | | | |
| Start Up Delay | | 1.5 | 2.0 | s | |
| Hold Up Time | 20 | 30 | | ms | With full output load |
| Line Regulation | | | <0.1 | % | |
| Load Regulation | | | <1 | % | |
| Ripple & Noise | | | 50/1 | mV/% pk-pk | At 20MHz bandwidth whichever is the greater. 6E module has 1.5% max on V1 and V2. 6N modules has 1.5% max on V1 and 3% max on V2 |
| Overvoltage Protection | 115 | | 130 | % V nom | |
| Overtemperature Protection | | | 115 | °C | Measured internally, auto reset |
| Overload Protection | 110 | | 140 | % I nom | |
| Short Circuit Protection | Continuous trip and restart (hiccup mode) | | | | |
| Temperature Coefficient | | | 0.03 | %/°C | |
| Remote Sense | | | 0.5 | V | Compensates for maximum voltage drop for 0.5V |
| Enable & Inhibit | See signals page | | | | |
| Current Share | See signals page | | | | |
| Standby | | 5V/2A | | | Isolation classed as functional, between this and all other circuits |

General

| Characteristic | Minimum | Typical | Maximum | Units | Notes & Conditions |
|----------------------------|---------|---------|---------|-------|-------------------------|
| Efficiency | | 88 | | % | Configuration dependent |
| Isolation: Input to Output | 3000 | | | VAC | |
| | 1500 | | | VAC | |
| | 250 | | | VDC | |
| Switching Frequency | | 65 | | kHz | PFC converter |
| | | 200 | | | For modules |
| Mean Time Between Failure | | 225 | | khrs | MIL-STD-217F at 25°C GB |

Environmental

| Characteristic | Minimum | Typical | Maximum | Units | Notes & Conditions |
|-----------------------|---|---------|---------|-------|---|
| Operating Temperature | -20 | | +70 | °C | For operation above +50°C, derate linearly to 50% load at +70°C |
| Storage Temperature | -40 | | +85 | °C | |
| Humidity | 5 | | 95 | %RH | Non-condensing |
| Operating Altitude | | | 3000 | m | |
| Cooling | Forced air cooling (via field-replaceable internal fan). Fan speed control optional | | | | |
| Shock | MIL STD-810 Method 516.4 Procedure 1, 30g, half sine, 6 axes | | | | |
| Vibration | MIL STD-810 Method 514.4 Procedure 1, 1g rms, 5-500Hz, 3 axes | | | | |

EMC: Emissions

| Phenomenon | Standard | Test Level | Notes & Conditions |
|--------------------|-------------|------------|--------------------|
| Conducted | EN55032 | Class A | |
| Radiated | EN55032 | Class A | |
| Harmonic Emissions | EN61000-3-2 | | |

EMC: Immunity

| Phenomenon | Standard | Test Level | Criteria | Notes & Conditions |
|------------------------|----------------------|--------------------------|----------|--------------------|
| Low Voltage PSU EMC | EN61204-3 | High severity level | As below | |
| ESD | EN61000-4-2 | 4 | A | |
| Radiated | EN61000-4-3 | 10V/m | A | |
| EFT | EN61000-4-4 | 3 | A | |
| Surge | EN61000-4-5 | Installation class 3 | A | |
| Conducted | EN61000-4-6 | 10V/m | A | |
| Magnetic Fields | EN61000-4-8 | 3A/m | A | |
| Dips and Interruptions | EN55024 (180VAC) | Int >100% (0VAC) 8.4ms | A | |
| | | Int 100% (0VAC) 16.7ms | A | |
| | | Dip 60% (72 VAC) 200ms | A | |
| | | Dip 30% (126 VAC) 500ms | A | |
| | | Dip 20% (144 VAC) 5000ms | A | |
| | EN55024 (208VAC) | Int >100% (0VAC) 8.4ms | A | |
| | | Int 100% (0VAC) 16.7ms | A | |
| | | Dip 60% (83 VAC) 200ms | A | |
| | | Dip 30% (145 VAC) 500ms | A | |
| | | Dip 20% (166 VAC) 5000ms | A | |
| | SEMI F47 (200VAC) | Dip 33% (134VAC) 500ms | A | |
| | | Dip 22% (1000VAC) 1000ms | A | |
| Dip 55% (90 VAC) 200ms | | A | | |

Safety Approvals


| Certification | Standard | Notes & Conditions |
|----------------------------|----------------------------------|------------------------|
| CB | IEC60950-1 / IEC62368-1 | Information Technology |
| UL | UL62368-1 | Information Technology |
| EN | EN62368-1 | Information Technology |
| Equipment Protection Class | Class I | |
| CE | Meets all applicable directives | |
| UKCA | Meets all applicable legislation | |

Signals

Global AC OK/Power Fail

Global AC OK is an isolated transistor of an optocoupler providing a minimum of 5ms warning of loss of output regulation. The signal is fully isolated and the collector and emitter must be connected externally.

Maximum sink current 2mA, maximum voltage 20V.

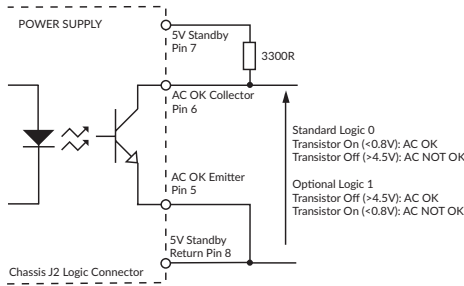


Global DC OK

Global DC OK is an isolated transistor of an optocoupler providing warning that the output voltage has fallen below 90% of nominal. The signal is fully isolated and the collector and emitter must be connected externally.


Maximum sink current 2mA, maximum voltage 20V.

On Dual output module, DC OK monitors V1 output only.

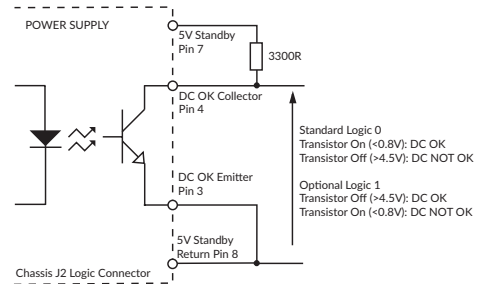


Global Inhibit

Global Inhibit is an isolated control signal input which turns the power supply off by supplying 2 to 5mA into the pin. Global Enable option available, see 'Other Option Codes' table.

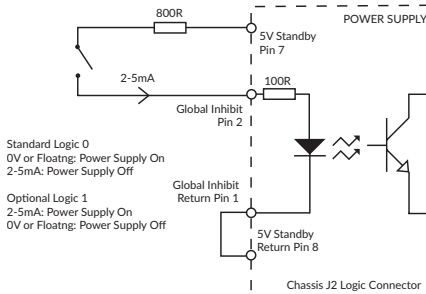

Fan Fail


When fan speed control fitted (option 16) Open connector signal warns of any fan failure. Note: Can use 5V standby for 5V EXT.

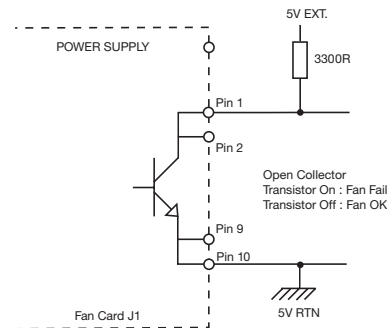

Module DC OK


Module DC OK is a nominal "ON" isolated transistor of an optocoupler which provides a warning of the loss of output regulation on the main output of the module.

Maximum sink current 2mA, maximum voltage 20V.

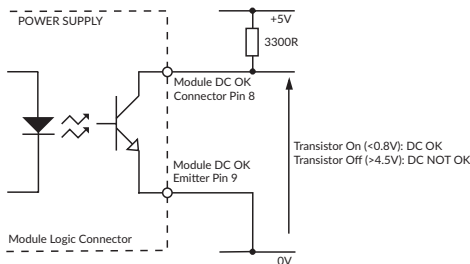


Module Inhibit

Module Inhibit signal is an isolated control signal which turns the module off by supplying 2 to 5mA into the pin. '4' series modules have a 100R internal series resistor. Add resistance as necessary to maintain drive current at 2 to 5mA.

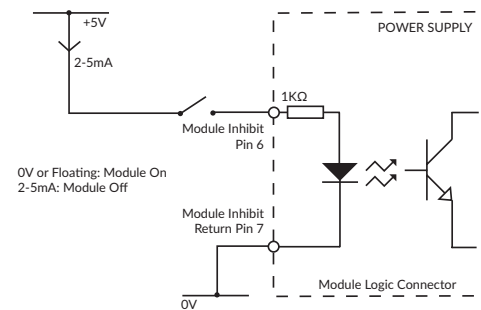

Current Share


Connecting pins 2 and 4 of like voltage modules (4 maximum) within the same chassis or separate chassis will force the current to share between the outputs. Different slot width modules share in proportion to their output current rating.

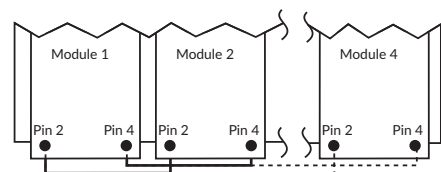

Module Mechanical Details


Single Output

2 Slot Modules

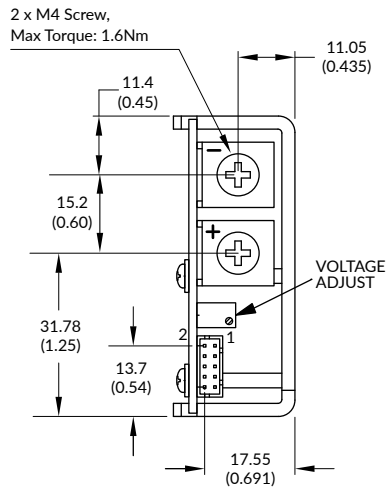


2 Slot Modules

(1R/2R Peak)

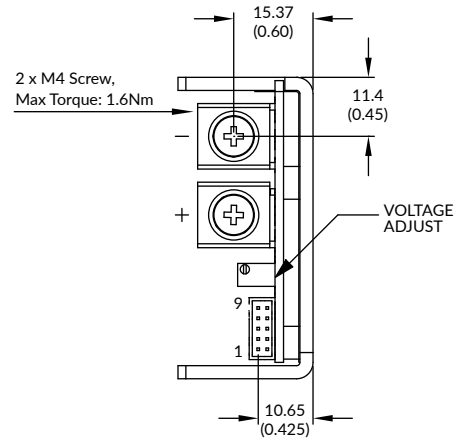


3 Slot Modules

(3R Peak)

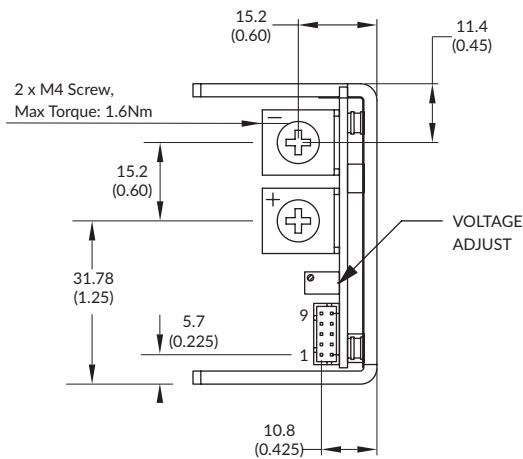

4 Slot Modules

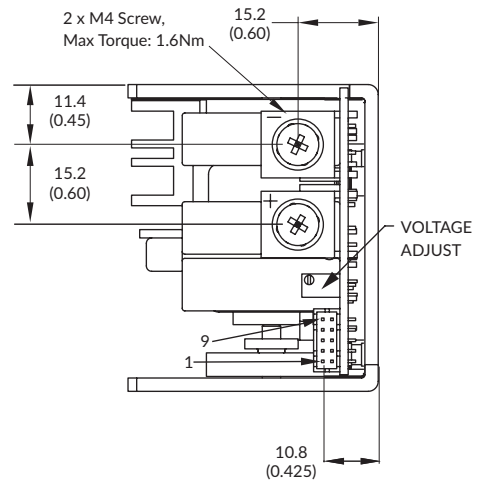

Single Output: Module Logic Connector Pinouts

| Pin | Function | Pin | Function |
|-----|----------|-----|-----------------------|
| 1 | Sense + | 6 | Inhibit |
| 2 | Sense - | 7 | Module Inhibit Return |
| 3 | V Prog | 8 | DC OK Collector |
| 4 | I Share | 9 | DC OK Emitter |
| 5 | Not Used | 10 | Not Used |


Notes:

- All dimensions in mm (inches). Tolerance: .xx = ±0.50 (±0.02) .xxx = ±0.25 (±0.01)
- Weight: 2/2R Slot: 218g (0.48lb) approx, 3 Slot: 335g (0.74lb) approx.
4 Slot: 431g (0.95lb) approx.

- Mating plug: JST part no. PHDR-10VS.
- Contact: 26-22 AWG JST part no. SPHD-001T-P0.5.
- Connector kit available order part no. fleXPower CONKIT.

Module Mechanical Details

Dual Output 2 Slot Modules

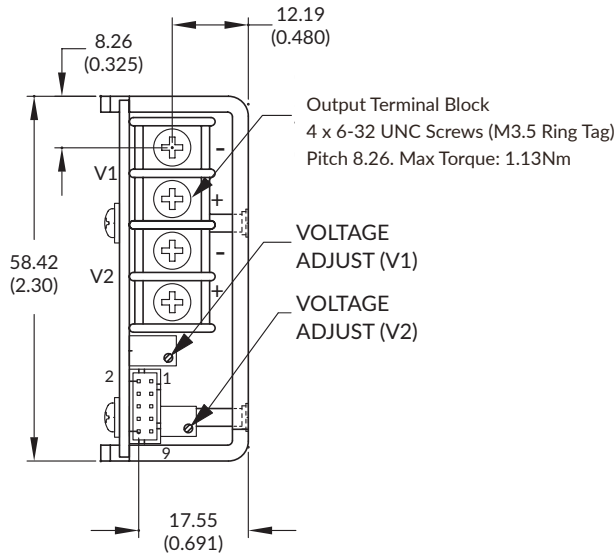


| Dual Output: Module Logic Connector Pinouts | | | |
|---|------------|-----|-----------------------|
| Pin | Function | Pin | Function |
| 1 | V1 Sense + | 6 | Inhibit |
| 2 | V1 Sense - | 7 | Module Inhibit Return |
| 3 | Not used | 8 | DC OK Collector |
| 4 | Not used | 9 | DC OK Emitter |
| 5 | V2 Sense + | 10 | V2 Sense - |

Notes:

- All dimensions in mm (inches). Tolerance: .xx = ±0.50 (±0.02); .xxx = ±0.25 (±0.01).
- Weight: 218g (0.48lb) approx.
- Mating plug: JST part no. PHDR-10VS.
- Contact: 26-22 AWG JST part no. SPHD-001T-P0.5.
- Connector kit available order part no. fleXPower CONKIT.

Fan Speed Control Module 2 Slot Modules

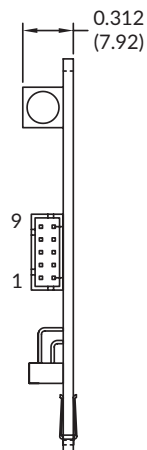


| Fan Speed Control Module Connector Pinouts | | | |
|--|----------|-----|----------|
| Pin | Function | Pin | Function |
| 1 | Fan Fail | 6 | Not used |
| 2 | Fan Fail | 7 | Not used |
| 3 | Not used | 8 | Not used |
| 4 | Not used | 9 | Ground |
| 5 | Not used | 10 | Ground |

Notes:

- All dimensions in mm (inches). Tolerance: .xx = ±0.50 (±0.02); .xxx = ±0.25 (±0.01).
- Weight: 45g (0.10lb) approx.
- Mating plug: JST part no. PHDR-10VS.
- Contact: 26-22 AWG JST part no. SPHD-001T-P0.5.
- Connector kit available order part no. fleXPower CONKIT.


Mechanical Details

XTL30 Chassis

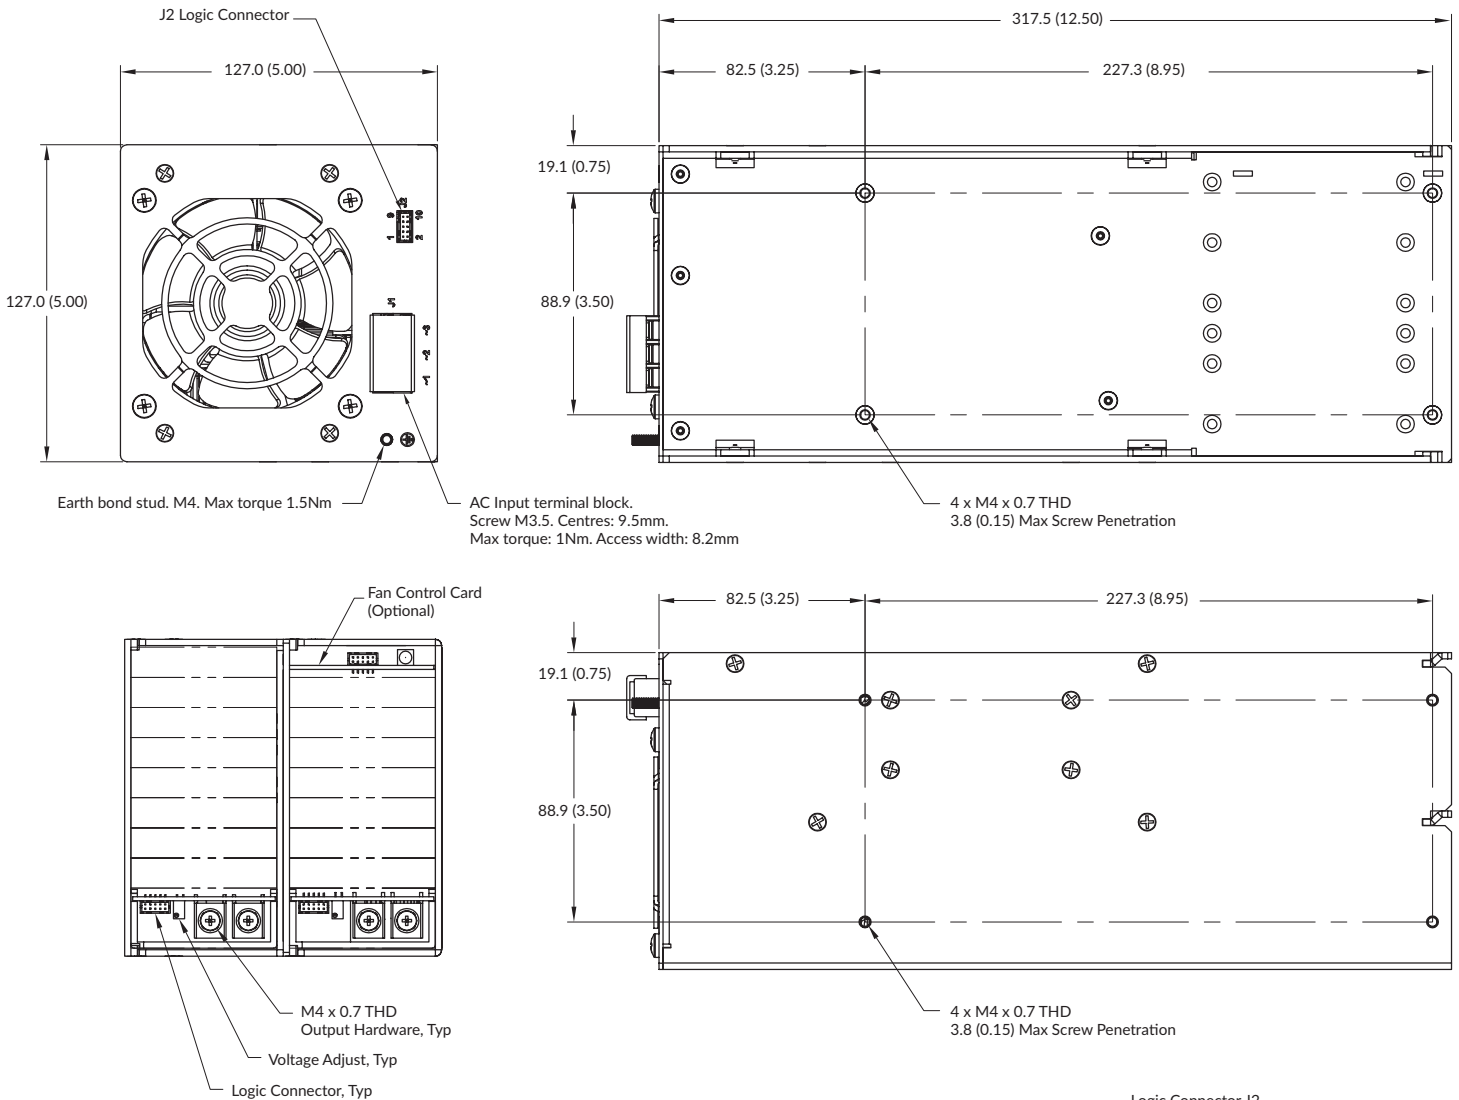

Shown With 2-slot Width Modules And 1-slot Width Fan Control Card For Reference

| J2 Logic Connector JST Part no. S10B-PHDSS(LF) | | | |
|---|------------------------|-----|------------------------|
| Pin | Function | Pin | Function |
| 1 | Global Inhibit Return | 6 | Global AC OK Collector |
| 2 | Global Inhibit | 7 | 5V Standby |
| 3 | Global DC OK Emitter | 8 | 5V Standby Return |
| 4 | Global DC OK Collector | 9 | Manufacturer Use Only |
| 5 | Global AC OK Emitter | 10 | Manufacturer Use Only |

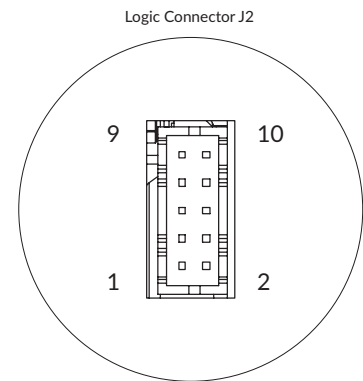

Notes:

- All dimensions in mm (inches).
Tolerance: .xx = ±0.50 (±0.02); .xxx = ±0.25 (±0.01).
- Weight: 2.80kg (6.15lb) approx.

- Logic Connector: Mating plug: JST part no. PHDR-10VS.
Contact: 26-22 AWG JST part no. SPHD-001T-P0.5.