

140W BENCH MOUNT

AC-DC POWER SUPPLIES

The NTN140 series are highly stable linear regulated power supplies with low ripple and an isolated output. Featuring thyristor (SCR) pre-regulation followed by transistor regulation to provide double stabilization.

The power supplies can be operated in local, analog (optional) and digital (optional) operating modes.

Sense line connections provide feedback compensation for voltage drop in the load lines



Dimensions

See mechanical details table

Features

- Output voltages 0-6.5VDC to 0-65VDC isolated
- Single phase AC input
- Continuous operation at full rated power
- Multi-function control panel with user friendly interface
- Digital, LAN and USB interface option
- Analog programming/interface option
- Manual voltage & current control with automatic transition & digital display
- Set-point display via a button
- Set-point adjustment possible with disabled output
- Push-button switch for output voltage
- Short circuit & arc protection
- 2 year warranty

Benefits

- Provides maximum device control & flexibility.
- Safe operation ensures maximum protection to the power supply
- User friendly controls
- Lighter than the leading brand products & easier to maintain
- Low cost of ownership

Applications

- Laboratory power

Models & Ratings

Model Number	Polarity	Output Voltage	Output Current	Input Voltage	Frequency
NTN140-6V5	Isolated	0 to 6.5V	0 to 10A	230VAC ±10%	47 to 63Hz
NTN140-12V5	Isolated	0 to 12.5V	0 to 8A	230VAC ±10%	47 to 63Hz
NTN140-20	Isolated	0 to 20V	0 to 6A	230VAC ±10%	47 to 63Hz
NTN140-35	Isolated	0 to 35V	0 to 4A	230VAC ±10%	47 to 63Hz
NTN140-65	Isolated	0 to 65V	0 to 2A	230VAC ±10%	47 to 63Hz

Options

- Coarse/fine-potentiometers (99%/1%) for more accurate adjustment of voltage and/or current
- Analog Programming/Interface
- Analog Programming/Interface, floating
- Computer interfaces -IEEE 488, RS 232, RS 422, RS485, Profi-bus DP, USB, LAN (more on request)
- Signal for output voltage <50V
- Higher stability
- Supply voltages other than that shown in the models & ratings table may be specified
- Stability over 8 hours under constant conditions: $<\pm 1 \times 10^{-5}$
- Temperature coefficient: $<\pm 1 \times 10^{-5}$ /K within the specified temperature range

Please consult XP Power Sales

Input

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Input Voltage	See models and ratings table				
Efficiency	90	See notes & conditions	90%	%	6.5V to 20V typ. 70%-80% 35V to 350V typ. 90%
Overvoltage Category		II			
Protection Class		I			

Output

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Output Voltage Range	See models and ratings table				
Output Current Range	See models and ratings table				
Output Control	Continuous adjustment from 0 to rated voltage/current by front panel mounted potentiometers.				
Output Polarity	Isolated, each output terminal can be earthed. Exception: If a non-isolated Analog Programming/Interface is installed, the A+ output pole is earthed.				
Output Isolation	Each output pole can be put on a potential max. $\pm 500V$ against PE. Exception: If a non-isolated Analog Programming/Interface is installed, the A+ output pole is earthed.				
Voltage Control Time	<5ms, typical 2ms with load changes from 10% to 100% or 100% to 10%				
Voltage Setting Range	Using the VOLTAGE potentiometer, approx. 0.1% to 100% of the rated value				
Current Control Time	<500ms with load changes <10%, depending on type. Devices with a rated voltage from 65V briefly shut down in the event of greater load changes, the residual energy is released in an unregulated manner.				
Current Setting Range	Using the CURRENT potentiometer, approx. 0.1% to 100% of the rated value				
Setting Time at Rated Load	<100ms to 500ms, depending on type, for changes in the output voltage from 10% to 90% or 90 to 10%, respectively				
Set Point Resolution	< $\pm 1 \times 10^{-3}$ of rated value with potentiometer on front panel < $\pm 1 \times 10^{-5}$ of rated value with fine potentiometer 1×10^{-4} of rated value with option interface				
Discharge Time Constant	Operated without a load the typical discharge time will be between 2s and 60s, depending on type.				
Accuracy	Voltage < $\pm 0.2\%$ of rated value Current < $\pm 0.2\%$ of rated value for current ranging between >5mA to <200A Current < $\pm 0.5\%$ of rated value for current ranges <5mA or >200A Additional digital display error < ± 2 digits				
Residual Ripple	< 1×10^{-4} of rated value +30mVpp (measuring bandwidth 30Hz - 10MHz) < 3×10^{-5} of rated value +10mV RMS				
Control Deviation	$\pm 10\%$ mains voltage variation: < $\pm 1 \times 10^{-5}$ of the rated value 0 to 100% load change: < $\pm 2 \times 10^{-4}$ of the rated value Over 8 hours: < $\pm 1 \times 10^{-4}$ of the rated value Temperature deviations < $\pm 1 \times 10^{-4}/K$ of the rated value				
Short Circuit Protection	The power supply is short circuit and arc proof. The maximum current can be drawn at any output voltage, even in the event of a short circuit.				
Inrush Current Limiting	Standard for $\geq 700W$				
Sense Line Connections	Compensate for voltage drop in the load lines (this applies for devices up to 350V output voltage) Voltage drop up to 5% (but at least 1V) of the nominal voltage will be compensated.				

Environmental

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Temperature Operation	0		+40	°C	
Storage Temperature	-20		+50	°C	
Humidity Operating	0		+80	%	Up to +31°C, decreasing linearly down to 50% relative humidity at +40°C
Storage Humidity	No precipitation and max. relative humidity of 80%				
Cooling	Heat generated in the power supply unit is dissipated by convection or, in the case of high-power units, by forced ventilation				
Operating Altitude			2000	m	Above sea level
Protection	IP20				

Signals & Controls

	Function
Front panel	Voltage and current potentiometer, power switch, HV ON/OFF switch, digital display for current and voltage, voltage limit potentiometer. Display of the output voltage and current set points is possible with the SETVALUES push-button.
Operating Modes	The output's polarity is isolated (see models & ratings table). The power supplies can be operated in the LOCAL, ANALOG (optional) and DIGITAL (optional) operating modes.
Displays	DVM for voltage and current, range ± 20000

EMC: Emissions


Phenomenon	Standard	Notes & Conditions
Harmonic Currents	EN61000-6-2	
Voltage Flicker	EN61000-6-3	

Safety Approvals

Safety Agency	Safety Standard	Notes & Conditions
EN	EN61010-1	
CE	Meets all applicable directives	
UKCA	Meets all applicable legislation	

Mechanical Details

Front view with controls

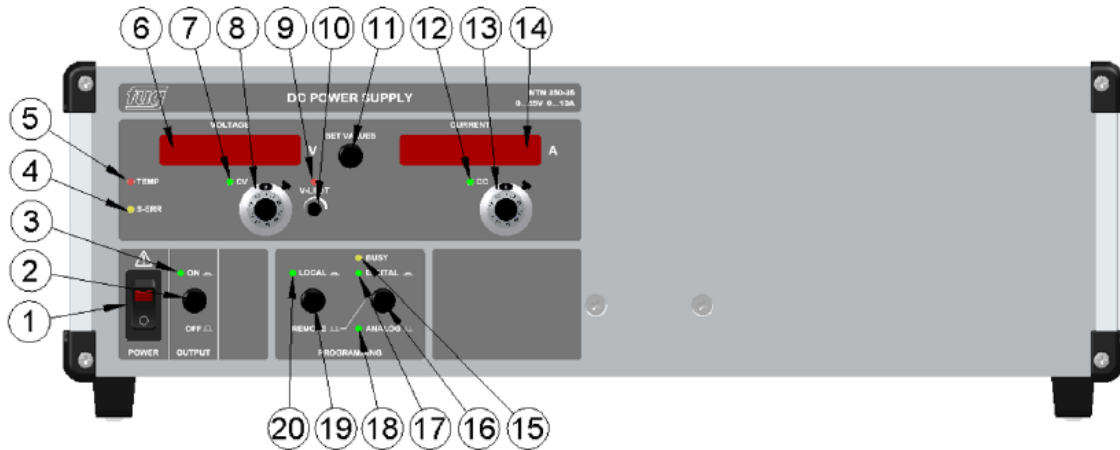


Front panel shown for illustrative purposes only, dimensions and layout differ by power rating - see mechanical details table.

Number	Function	Number	Function
1	AC power switch with indicator light Insulates the power supply from mains, two-pole disconnection	11	SET VALUES Switch displays between Set-point mode and Actual output mode, displays flashes when in set point mode.
2	Release of DC output (OUTPUT) No isolation from mains.	12	LED for constant current control mode (Constant Current CC)
3	LED: DC output ON Green when the controller and the power stage is operating (OUTPUT ON)	13	Ten-turn potentiometer with lockable precision dial for current adjustment
4	S-ERR LED for errors at the sense connections or sense lines	14	Current display flashing: Set point not flashing: Actual value
5	Over-temperature LED, internal device temperature too high, fan failure or restricted fan. (Use is type-dependent)	15	LED BUSY displays data traffic on the digital interface (Optional)
6	Voltage display flashing: Set point not flashing: Actual value	16	Switching the operation mode between REMOTE/ANALOG and REMOTE/DIGITAL (Optional)
7	LED for constant voltage control mode (Constant Voltage CV)	17	LED indicating digital programming active (Optional)
8	Ten-turn potentiometer with lockable precision dial for voltage adjustment	18	LED indicating Analog Programming/Interface active (Optional)
9	LED for active voltage set-point limitation	19	Switching the operation mode between LOCAL and REMOTE (Optional)
10	Set-point limit adjustment for voltage V-LIMIT (can only be operated with a tool)	20	LED indicating local control mode active (Optional)

Mechanical Details

Rear view with single phase AC input

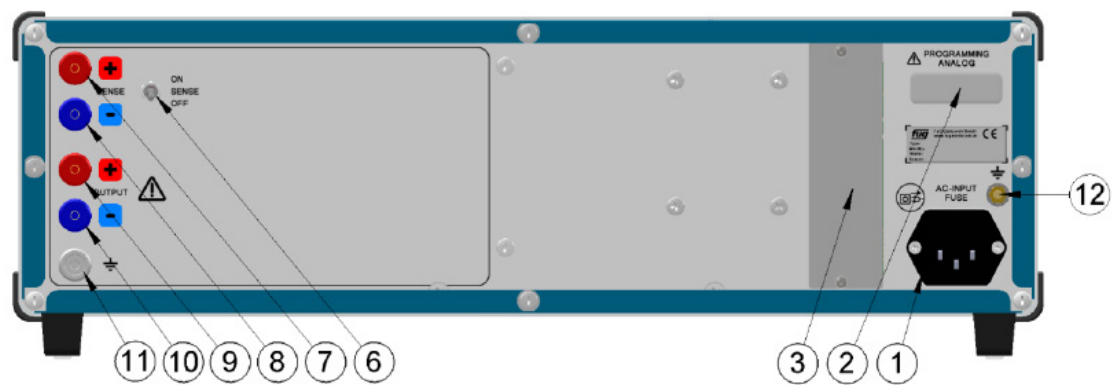

Rear panel shown for illustrative purposes only, dimensions and layout differ by power rating - see mechanical details table.

Number	Function	Number	Function
1	AC input with mains fuses Up to 700W: IEC connector (as shown) with integrated fuse, at 1400W, C20 mains cable in accordance with IEC60320-C20, equipped with automatic circuit breaker.	8	Negative connection for sense line (SENSE -)
2	15-pin Sub-D connector for Analog programming/interface (Optional)	9	Positive output A+ (Up to 20A 4mm safety sockets, for current up to 300A screw terminals, beyond 300A copper bars)
3	Slot for digital interface (e.g.: IEEE-488, RS232, USB, LAN, ...) (Optional)	10	Negative output A- (Up to 20A 4mm safety sockets, for current up to 300A screw terminals, beyond 300A copper bars)
6	Switch for sense (SENSE ON / OFF)	11	Earthing socket: Can be connected to the ground of the load; this applies for devices with an output current ≤20A
7	Positive connection for sense line (SENSE +)	12	Earthing bolt: This connection can be connected to the mains ground

Mechanical Details

Model Number	Mounting	Width		Height		Depth	Weight
NTN140-6V5	Bench mount ⁽¹⁾	½ 19"	222mm	3U	133mm	350mm	9kg
NTN140-12V5	Bench mount ⁽¹⁾	½ 19"	222mm	3U	133mm	350mm	9kg
NTN140-20	Bench mount ⁽¹⁾	½ 19"	222mm	3U	133mm	350mm	9kg
NTN140-35	Bench mount ⁽¹⁾	½ 19"	222mm	3U	133mm	350mm	9kg
NTN140-65	Bench mount ⁽¹⁾	½ 19"	222mm	3U	133mm	350mm	9kg

Notes:

- 1. Rack mount option

Cables

Mains input cable
Single phase mains: with CEE-7/7

Mating Connectors
For control inputs and outputs not included (Digital interface cables are commercially available)