

2 Watt IJ Series



- Single Output
- DIP 16 Package
- Industry Standard Pinout
- 6000 VDC Isolation
- -40 °C to +85 °C Operation
- MTBF >3.5 MHrs
- 3 Year Warranty

Specification

Input

- Input Voltage Range • Nominal $\pm 10\%$
 Input Reverse Voltage Protection • None

Output

- Output Voltage • See table
 Minimum Load • 10%
 Line Regulation • 1.2%/1% ΔV_{in}
 Load Regulation • 7.5% max for a 10-100% load change
 Setpoint Accuracy • 100-110% of nominal at 10% load
 Ripple & Noise • 200 mV pk-pk 20 MHz bandwidth
 Temperature Coefficient • 0.03%/°C
 Short Circuit Protection • Continuous

General


- Efficiency • See table
 Isolation Voltage • 6000 VDC, 1 minute
 Isolation Resistance • $10^9 \Omega$
 Isolation Capacitance • 10 pF typical
 Switching Frequency • 50 kHz typical at nominal input, full load
 MTBF • >3.5 MHrs to MIL-HDBK-217F at 25 °C, GB

Environmental

- Operating Temperature • -40 °C to +85 °C
 Storage Temperature • -55 °C to +125 °C
 Case Temperature • 105 °C max
 Cooling • Convection-cooled
 Lead Temperature • 260 °C, 0.06 in (1.5 mm) from case, 10 s


Input Voltage	Output Voltage	Output Current	Efficiency (typ)	Model Number
5 VDC	5.0 V	400 mA	76%	IJ0505DA
	12.0 V	167 mA	79%	IJ0512DA
12 VDC	5.0 V	400 mA	76%	IJ1205DA
	12.0 V	167 mA	80%	IJ1212DA
	15.0 V	133 mA	79%	IJ1215DA
24 VDC	12.0 V	167 mA	80%	IJ2412DA

Mechanical Details

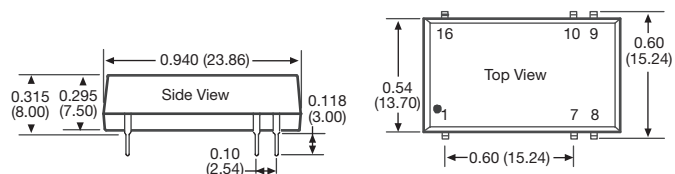

Recommended footprint

Top view grid: 0.1 x 0.1 in (2.54 x 2.54 mm)
 Diameter: 0.39" (1.0 mm)



Pin	Function
1	-Vin
7	NC
8	NC
9	+Vo
10	-Vo
16	+Vin

Notes

Dimensions in inches (mm)
 Tolerance: ± 0.010 (± 0.25)
 Weight: 0.008 lbs (3.8 g)

Pin diameter: 0.024 x 0.010 (0.60 x 0.25)
 Pin tolerance: ± 0.004 (± 0.10 mm)