

5000 Watts



- 3 Phase 180 to 528 VAC Input - 3 Wire & Earth
- High Efficiency - up to 94%
- Programmable Output Voltage (0-105%)
- Programmable Output Current (0-110%)
- Parallel Operation
- Analog & Digital Interfaces
- Multiple Digital Protocols - PMBus, CANopen, MODBUS & SCPI
- Fully Featured Signals & Controls
- Graphical User Interface (GUI)
- 3 Year Warranty

Dimensions:

HPT5K0:
13.00 x 5.00 x 5.00" (330.2 x 127.0 x 127.0 mm)

The HPT5K0 series offers users both output voltage and output current programming, via voltage, I²C PMBus, RS485 and CANopen in a very high efficiency, high power density 5 kW chassis mount package. Options are available for RS232 or UART. Measuring just 13.0" x 5.0" x 5.0", the HPT5K0 also features active current sharing, remote on/off, remote sense and a power OK signal. The standby output is available whenever the mains supply is present.

Models & Ratings

| Max Output Power | Output Voltage V1 | | | Output Current | | Efficiency ⁽¹⁾ | Model Number ^(2,3) |
|------------------|-------------------|---------|----------|----------------|---------|---------------------------|-------------------------------|
| | Min | Nominal | Max | Min | Max | | |
| 5000 W | 0 VDC | 48 VDC | 50.4 VDC | 0.0 A | 104.0 A | 93% | HPT5K0TS048 |
| 5000 W | 0 VDC | 60 VDC | 63 VDC | 0.0 A | 83.3 A | 93% | HPT5K0TS060 |
| 5000 W | 0 VDC | 100 VDC | 105 VDC | 0.0 A | 50.0 A | 93% | HPT5K0TS100 |
| 5000 W | 0 VDC | 200 VDC | 210 VDC | 0.0 A | 25.0 A | 93% | HPT5K0TS200 |


Notes

1. Measured with 480 VAC input and full load.
2. Standard models include PMBus, CANopen and RS485 interfaces. RS485 default is full duplex. RS485 half duplex can be configured via I²C or factory configured on request. To replace RS485 with RS232 or UART, contact sales.
3. For medical applications with 4000 VAC isolation test add suffix -M. Installation Class 3 surge only.
4. USB interface available to enable RS485 and RS232 communication with GUI, part number XP PS MANAGER INT.

Input

| Characteristic | Minimum | Typical | Maximum | Units | Notes & Conditions |
|-----------------------|--|---------|---------|-------|--|
| Input Voltage | 180 | | 264 | VAC | 3 kW output power max, 3 wire & earth |
| | 342 | | 528 | VAC | 5 kW output power max, 3 wire & earth |
| | | | 580 | VAC | For 5 s |
| Input Frequency | 47 | | 63 | Hz | |
| Power Factor | | 0.96 | | | Complies with EN61000-3-2 for Class A |
| Input Current | | | 10/11 | A | Per phase, 342 VAC (5 kW)/180 VAC (3 kW) |
| Inrush Current | | | 60 | A | Per phase, 528 VAC (5 kW) |
| Earth Leakage Current | | | 1.0 | mA | 528 VAC/60 Hz |
| | | | 3.3 | | 528 VAC/60 Hz, single fault |
| Input Protection | F16A / 500 V fuse fitted in each phase | | | | |
| Loss of phase | Shut down after 0.5s, auto-recovery | | | | |


Input Derating

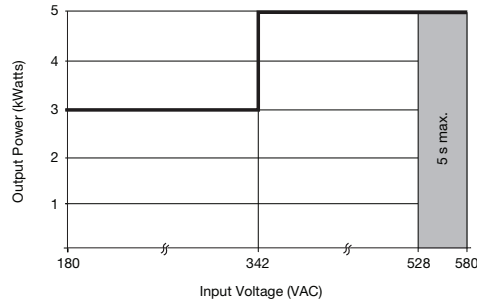


Output

| Characteristic | Minimum | Typical | Maximum | Units | Notes & Conditions |
|----------------------------|---|---------|------------------|--------------------|---|
| Output Voltage | 0 | | 210 | VDC | See Models and Ratings table |
| Output Set Tolerance | | ±0.5 | | % | Nominal voltage irrespective of set voltage. |
| +5 V Standby Tolerance | | ±3 | | % | 5V Standby |
| Output Voltage Program | 0 | | 105 | % | Of nominal, slew rate <40 ms 10-105% & 105-10%. Max frequency of voltage program is 0.5 Hz 0-5% load, 0.67 Hz 5-10% load, 1Hz 10-20% load, 3 Hz 20-100% load |
| Output Voltage Adjust | ±10 | | | % | Of set output via potentiometer 105% of nominal max. |
| Output Current Program | 0 | | 110 | % | Of nominal |
| Minimum Load | 0 | | | A | No minimum load required |
| Start Up Delay | | 1.8 | 2 | s | Under all load and line conditions |
| Start Up Rise Time | | | 40 | ms | |
| Hold Up Time | 20 | 22 | | ms | 380 VAC at 5000 W and 25 °C |
| | 40 | 44 | | | 180 VAC at 3000 W and 25 °C |
| Line Regulation | | | ±0.5 | % | Of nominal voltage |
| | | | ±0.5 | | 5V Standby |
| Load Regulation | | | 1 | % | 0-100% or 100-0% load |
| | | | 2 | | 5V Standby |
| Transient Response | | | 3 | % | Deviation with a 50-75-50% load change. Output returns to within 1% in less than 500 µs |
| Ripple & Noise | | | 1/2.5 | % | Of nominal voltage/5V Standby. Measured with 20 MHz bandwidth limited oscilloscope 0-50 °C. |
| Overshoot | | | 5 | % | Turn on & turn off |
| Overvoltage Protection | 110 | | 120 | % | Of nominal voltage, latching. Cycle AC to reset. No protection for 5V Standby |
| Overtemperature Protection | | | | | Auto resetting thermal protection |
| Overload Protection | | | ±3 | % (of max load) | Set current limit point. Constant current characteristics. Max current limit is 108% ±3% of maximum rated current. For low line (180-264 VAC), constant power characteristic set at 3.4 kW until current limit point is reached. 5V Standby: <5 A max |
| Short Circuit Protection | | | | | Constant current characteristics. 5V Standby: Foldback characteristic < 5 A max. |
| Temperature Coefficient | | | 0.03 of max load | %/°C | |
| Remote Sense | Compensates for 1% max of nominal voltage per lead, 2% of total nominal voltage drop. Not fitted on HPT5K0TS200 | | | | |

Output Voltage Programming

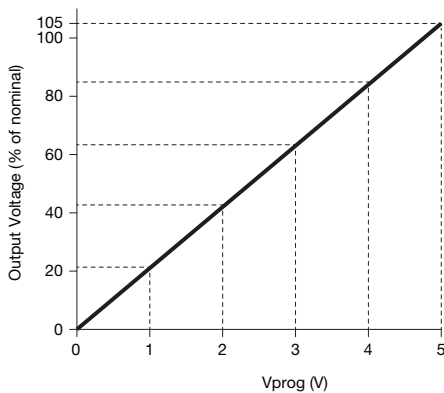

Output Current Programming

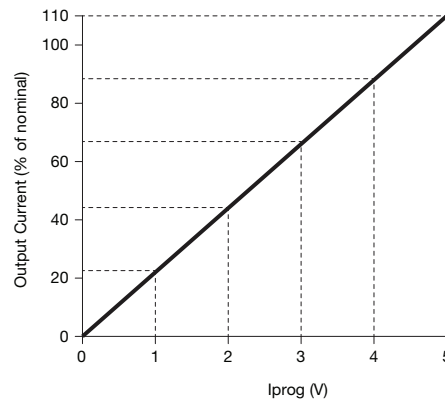

General

| Characteristic | Minimum | Typical | Maximum | Units | Notes & Conditions |
|---|---------|------------|---------|-------------------|--|
| Efficiency | 93 | 94 | | % | Measured from 342 to 528 VAC, 5V Standby at full load. |
| Isolation: Input to Output Input to Ground Output to Ground | 4000 | | | VAC | 2 x MOPP. Barrier only ⁽¹⁾ |
| | 1500 | | | VAC | 1 x MOPP |
| | 500 | | | VDC | |
| Switching Frequency | 55 | 60 | 65 | kHz | Fixed frequency PFC |
| | 40 | | 250 | kHz | Variable frequency main converter |
| Power Density | | | 15.38 | W/in ³ | |
| Signals and Controls | | | | | V Program, I Program, AC OK, DC OK, Fan Fail/Temperature Warning, Sync, PMBus, Inhibit, Current Share. |
| MTBF | | 450 | | kHrs | Telecordia 332, 25°C |
| Weight | | 12.5 (5.7) | | lb (kg) | |

1. For test at 4000 VAC, GDTs must be removed. -M versions available with installation Class 3 surge only. See models and ratings table.

Environmental

| Characteristic | Minimum | Typical | Maximum | Units | Notes & Conditions |
|-----------------------|--|---------|---------|-------|---|
| Operating Temperature | -20 | | 70 | °C | Derate linearly from 50°C to 50% rated power at 70 °C |
| Storage Temperature | -40 | | +85 | °C | |
| Cooling | | | | | Force-cooled with intelligent fan speed control |
| Humidity | 5 | | 95 | %RH | Non-condensing |
| Operating Altitude | | | 3000 | m | Medical |
| | | | 5000 | m | IT |
| Transport Altitude | | | 10000 | m | |
| Shock | ±3 x 30 g shocks in each plane, total 18 shocks. 30 g = 11 ms (±0.5 ms) half sine. Conforms to EN60068-2-27 & EN60068-2-47 | | | | |
| Vibration | Single axis 10-500 Hz at 2 g sweep and endurance at resonance in all 3 planes. Conforms to EN60068-2-6 | | | | |
| Acoustic Noise | < 70 db(A) Lw | | | | |

Signals & Controls

| | Function |
|--|--|
| V Program ⁽¹⁾⁽²⁾ | 0V to 5V signal will program Vout from 0-105%. VProg accuracy ±3% of nominal output voltage. When left open, supply will go into its default operating mode. |
| I Program ⁽¹⁾⁽²⁾ | 0V to 5V signal will program the current limit from 0-110%. When this signal is left open, supply will go into its default operating mode. IProg accuracy ±3% of maximum rating. |
| AC OK | LOW = Input Voltage is within operating range, HIGH = Input Voltage is outside of operating range or there is a loss of phase. Uncommitted opto-transistor, 2 ms warning time |
| DC OK | When the supply is used as a variable output supply, this signal is disabled. When the supply is programmed as a fixed output supply, LOW = Vout > 95% of Vnominal. This level is programmable by the user through the PMBus. Uncommitted opto-transistor |
| Fan Fail/Temp Warning | High = Fan FAIL and/or overtemperature, Low = Fan OK and temperature OK (3.3V Logic), unit switches off 10 s after Fan Fail/Temp Warning alarm, auto recovery. XP GUI available for download, contact sales. |
| Sync. | Connect parallel units to synchronise output turn on. |
| PMBus, CANopen and RS485 Optional: RS485 can be replaced with RS232 or UART | The interface specification is detailed in a separate document "HPT5K0 Communication, Control and Status Specification". XP GUI available for download, contact sales. Vout monitor accuracy is ±1% of nominal voltage, Vout setting accuracy is ±1% of nominal voltage, Iout monitor accuracy is ±3% of full load, Iout setting accuracy is ±3% of full load. |
| Current Share | Connecting pin 23 on one unit to pin 23 on a like voltage unit will force the current to be shared. Up to 5 units can be paralleled. Current share accuracy ±3% of full system load. |
| Inhibit | Uncommitted opto diode. See Signals & Controls pg 6. |

⁽¹⁾ In analog mode, the default Vout and Iout settings are 0% when open circuit.

⁽²⁾ To activate analog mode, PMBus_EN (pin 24) must be pulled down to SGND. Default when open is digital programming.

EMC: Emissions

| Phenomenon | Standard | Test Level | Notes & Conditions |
|-------------------|-----------------|------------|--------------------|
| Conducted | EN55011/EN55032 | Class B | |
| Radiated | EN55011/EN55032 | Class A | |
| Harmonic Currents | EN61000-3-2 | Class A | |
| Voltage Flicker | EN61000-3-3 | | |

EMC: Immunity

| Phenomenon | Standard | Test Level | Criteria | Notes & Conditions |
|------------------------------|-------------------------------|-------------------------------|----------|--------------------------------------|
| ESD Immunity | EN61000-4-2 | 4 | A | ±8 kV contact / ±15 kV air discharge |
| Radiated Immunity | EN61000-4-3 | 3 | A | |
| EFT/Burst | EN61000-4-4 | 3 | A | |
| Surge | EN61000-4-5 | Installation class 4 | A | |
| Conducted | EN61000-4-6 | 3 | A | |
| Magnetic Field | EN61000-4-8 | 4 | A | |
| Dips and Interruptions | EN61000-4-11 (200/380 VAC) | Dip 100% (0 VAC), 8.4ms | A | |
| | | Dip 100% (0 VAC), 16.7ms | A | |
| | | Dip 60% (80/152 VAC), 200ms | A | |
| | | Dip 30% (140/266 VAC), 500ms | A | |
| | | Dip 20% (160/304 VAC), 5000ms | B | |
| | | Int 100% (0 VAC), 5000ms | B | |
| | EN61000-4-11 (240/480 VAC) | Dip 100% (0 VAC), 10ms | A | |
| | | Dip 100% (0 VAC), 20ms | A | |
| | | Dip 60% (96/192 VAC), 200ms | A | |
| | | Dip 30% (168/336 VAC), 500ms | A | |
| | | Dip 20% (192/384 VAC), 5000ms | B | |
| | | Int 100% (0 VAC), 5000ms | B | |
| | EN60601-1-2 (200/380 VAC) | Dip 100% (0 VAC), 10ms | A | |
| | | Dip 100% (0 VAC), 20ms | A | |
| | | Dip 60% (80/152 VAC), 100ms | A | |
| | | Dip 30% (140/266 VAC), 500ms | A | |
| | | Int 100% (0 VAC), 5000ms | B | |
| | EN60601-1-2 (240/480 VAC) | Dip 100% (0 VAC), 10ms | A | |
| | | Dip 100% (0 VAC), 20ms | A | |
| | | Dip 60% (96/192 VAC), 100ms | A | |
| Dip 30% (168/336 VAC), 500ms | | A | | |
| Int 100% (0 VAC), 5000ms | | B | | |
| SEMI F47 (200/380 VAC) | Dip 22% (156/296 VAC), 1000ms | A | | |
| | Dip 33% (134/254 VAC), 500ms | A | | |
| | Dip 55% (90/171 VAC), 200ms | A | | |


Safety Approvals

| Safety Agency | Safety Standard | Notes & Conditions |
|----------------------------|---|---|
| CB Report | IEC62368-1 Ed 2 | Information Technology |
| | IEC60601-1 Ed 3 Including Risk Management | Medical |
| UL | UL62368-1, CSA 22.2 No.62368-1, UL60950-1 | Information Technology |
| | ANSI/AAMI ES60601-1:2005 & CSA C22.2, No.60601-1:08 | Medical |
| TUV | EN62368-1 | Information Technology |
| | EN60601-1/2006 | Medical |
| CE | LVD & RoHS | |
| Equipment Protection Class | Class I | See safety agency conditions of acceptability for details |

| Means of Protection | Category |
|----------------------|-----------------|
| Primary to Secondary | IEC60601-1 Ed 3 |
| Primary to Earth | |
| Secondary to Earth | |
| | N/A |

Signals & Controls

Signal Connections

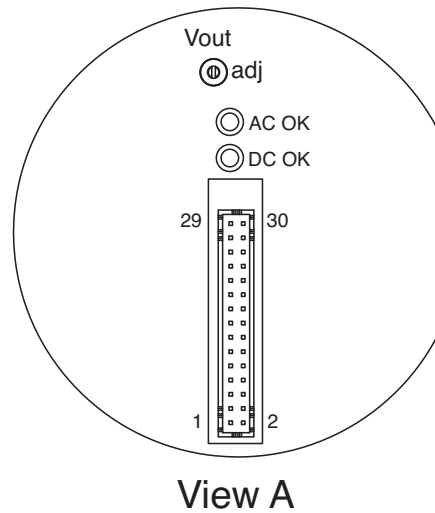


| J1 Signal Connector Connections | | |
|---------------------------------|-----------------------------------|--|
| Pin | Function | Description |
| 1 | DCOK | Low means Vout is within range (Opto Isolated; Open Collector) |
| 2 | DCOK Return | Return for DCOK (Opto Isolated) |
| 3 | Remote Inhibit | High to Inhibit - uncommitted opto diode |
| 4 | Remote Inhibit Return | Return for Inhibit - uncommitted opto diode |
| 5 | A0 | I ² C Device Address Bit (10kOhm pull up to 3.3V) |
| 6 | A1 | I ² C Device Address Bit (10kOhm pull up to 3.3V) |
| 7 | A2 | I ² C Device Address Bit (10kOhm pull up to 3.3V) |
| 8 | CANH | CAN Bus Communication using CANopen protocol |
| 9 | RS485_Y | RS485 Differential Serial Bus Communication |
| 10 | CANL | CAN Bus Communication using CANopen protocol |
| 11 | RS485_Z | RS485 Differential Serial Bus Communication |
| 12 | SGND | Signal Return |
| 13 | UART_RX/ RS232_RX/RS485_A | RS485 Differential Serial Bus Communication OR RS232 Serial Bus Communication OR UART |
| 14 | I ² C SDA | I ² C (10kOhm pull up to 3.3V) |
| 15 | UART_TX/ RS232_TX/RS485_B | RS485 Differential Serial Bus Communication OR RS232 Serial Bus Communication OR UART |
| 16 | I ² C SCL | I ² C Bus Clock (10kOhm pull up to 3.3V) |
| 17 | FAN_FAIL/TEMP WARNING | Fan Failure/Temp Warning Reporting (High means fan fails and/or overtemperature rating; 10kOhm pull up to 3.3V) |
| 18 | SYNC | Connect parallel units to synchronise output turn on |
| 19 | VPROG | 0 - 5V to set Vout from 0 to 105% ⁽¹⁾ (50.8 kΩ discharge resistor to SGND ⁽²⁾) |
| 20 | RS+ | Positive Remote Sense (HPT5K0TS048, HPT5K0TS060 and HPT5K0TS100 only) |
| 21 | RS- | Negative Remote Sense (HPT5K0TS048, HPT5K0TS060 and HPT5K0TS100 only) |
| 22 | I ² C I ² C | 0 - 5V to set Current Limit from 0 - 110% of rated current ⁽¹⁾ (50.8 kΩ discharge resistor to SGND ⁽²⁾) |
| 23 | ISHARE | 0 - 2.6V for current sharing of units in parallel |
| 24 | PMBUS_EN | Selecting Digital (open) or Analog (low) mode for VPROG & I ² C (10kOhm pull up to 3.3V) |
| 25 | ACOK | Low means AC is within range operating range (Opto Isolated; Open Collector) |
| 26 | ACOK Return | Return for ACOK (Opto isolated) |
| 27 | 5VSBY | 5V Standby |
| 28 | 5VSBY | 5V Standby |
| 29 | 5VSBY_RTN | 5V Standby Return |
| 30 | 5VSBY_RTN | 5V Standby Return |

Notes


1. In analog mode, the default Vout & Iout settings are 0% when Vprog & Iprog are open circuit.
2. To activate analog mode, PMBus_EN must be pulled down to 5VSBY-RTN. Default if left open is digital programming.

Signals & Controls


DC OK

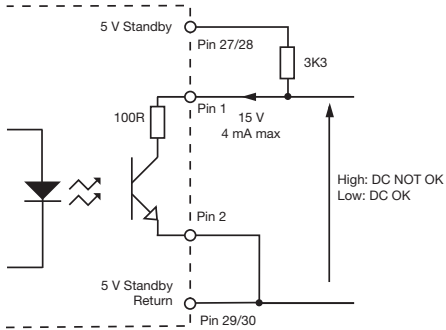


AC OK

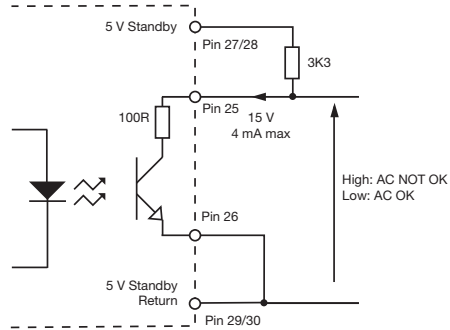


Fan Fail/Temperature Warning

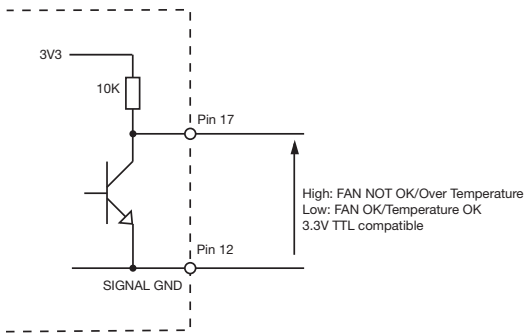

Inhibit

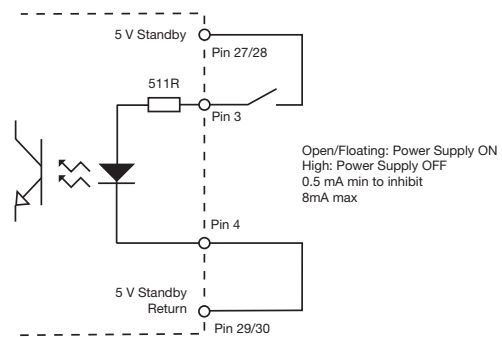


Current Share

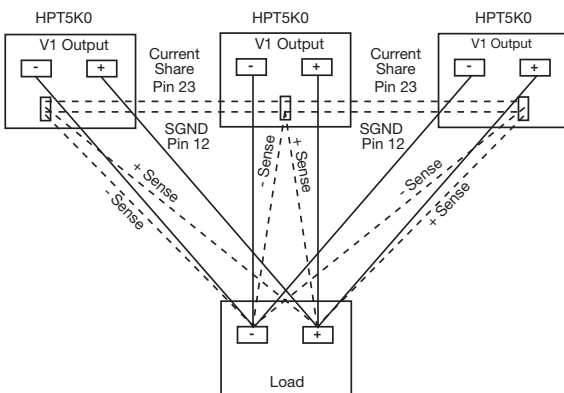

Up to 5 x HPT5K0 units

To synchronise output turn on from application of AC input, connect SYNC (pin 18) of parallel units together.

LED Signals

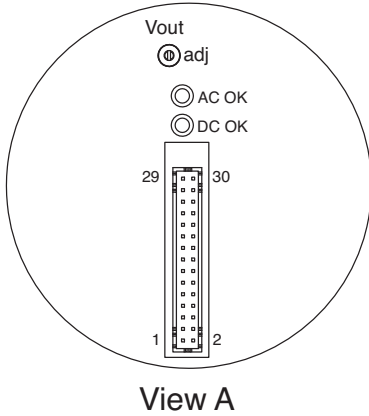


| Condition | LED State | | Signals | | | |
|---|---------------------------|---------------------------|---------|----------------------------|---------------------|------------------|
| | AC OK | DC OK | AC OK | DC OK | FAN_FAIL /TEMP. | Remote Inhibit |
| AC input OK | ON | ON ⁽³⁾ | LOW | LOW | LOW | LOW |
| AC not present or too low | OFF | OFF | HIGH | HIGH | LOW | X ⁽²⁾ |
| AC Present but out of range or PFC failure or no Primary to secondary communication | Blink (0.2s ON, 0.2s OFF) | OFF | HIGH | HIGH | LOW | X ⁽²⁾ |
| Output Over Voltage | ON | OFF | LOW | HIGH | LOW | LOW |
| Current Limit (Constant current response) | ON | Blink (0.2s ON, 0.2s OFF) | LOW | LOW or HIGH ⁽³⁾ | LOW | LOW |
| Fan Failure/Thermal Shutdown | ON | OFF | LOW | HIGH | HIGH ⁽¹⁾ | LOW |
| Remote OFF | ON | Blink (1.0s ON, 1.0s OFF) | LOW | HIGH | LOW | HIGH |
| PMBus Operation OFF | ON | Blink (1.0s ON, 1.0s OFF) | LOW | HIGH | LOW | LOW |

Notes

- In case of fan failure, and/or Overtemperature, FAN_FAIL/Temp Warning signal will be set 10s before output shutdown.
- Don't care / not applicable.
- DC_OK LED is ON if Output Voltage \geq VOUT_UV_FAULT_LIMIT, if Output Voltage $<$ VOUT_UV_FAULT_LIMIT, the DC_OK LED will be OFF

Mechanical Details

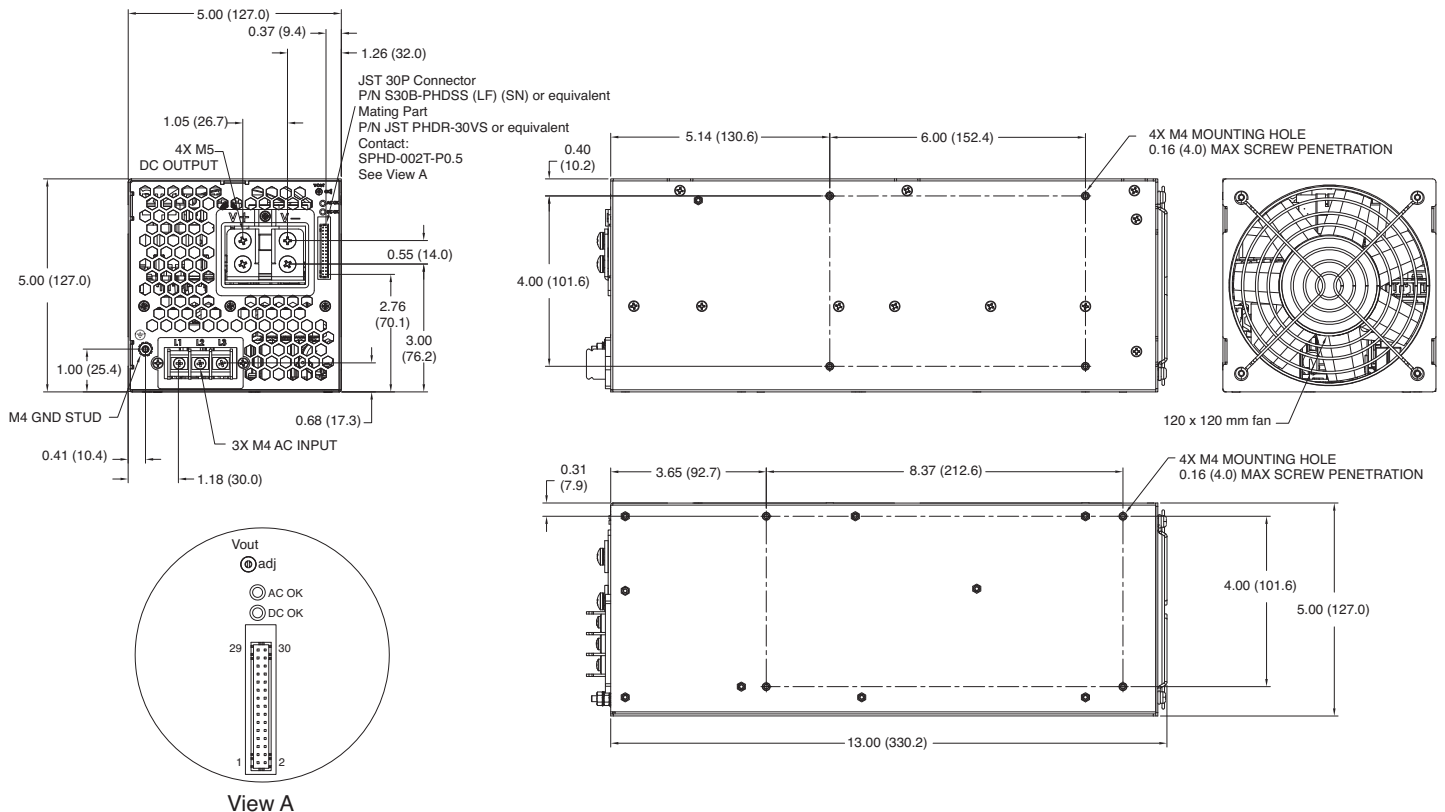

Notes

- All dimensions are in inches (mm).
- Weight 12.5 lb (5.7 kg)
- Signal Connector: P/N JST S30B-PHDSS (LF) (SN) or equivalent
Mates with P/N JST PHDR-30VS or equivalent
Contact: SPHD-002T-P0.5