

- COTS Component for Defense & Avionics Applications
- Environmental Performance to MIL-STD 810
- 10 to 50 VDC Transient Input Range
- 15 to 40 VDC Steady State Input Range
- 5W Max Output Power
- -55°C to 100°C Operation
- Cooling Plates and Optional Mounting Flange for Easy Integration
- Synchronous Rectification on Low Voltage Outputs
- MIL-STD 461 EMI Performance
- Frequency Synchronization



Introduction

The MTC05 is a COTS DC-DC converter developed specifically for the defense and avionics market. This product has a full military specification while offering the short lead-times and cost benefits of a COTS component.

The MTC05 uses a forward converter design switching at 450 kHz giving excellent size, efficiency and EMC performance. The input range is designed to provide short term operation over 10 – 50 VDC to enable the converter to work at full power through the dips and surges commonly seen in vehicle and aircraft applications. A soft start circuit provides well-controlled outputs with no overshoot.

Comprehensive control functions such as voltage trim, remote sense, inhibit and frequency synchronization to an external source are standard features.

When used in conjunction with the MTF input filter module the MTC05 complies to MIL-STD 461E/F/G CE/CS MIL-STD 1275A-E and MIL-STD 704A-F.

Input Characteristics

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Input Voltage	15.5	28	40	VDC	Continuous
Transient Input Voltage Range	10		50	VDC	10V for 10 s, 50V for 1 s at full load
UVLO Turn On	12.8		14.8	VDC	
UVLO Turn Off	8.5		9.8	VDC	
Maximum Input Current				A	See models and ratings table for details
Inhibited Input Current		1.2		mA	Verified by measurement
Inrush Current		40		A	Peak value
Input Reverse Voltage Protection					External components required

Output Characteristics

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Output Voltage				VDC	See models and ratings table for details
Output Current				A	See models and ratings table for details
Output Set Tolerance			±100	mV	
Minimum Load	0			A	No minimum load required
Ripple & Noise Vout ≤5V Vout >5V		24	60 1	mV %	pk-pk at 100% load and 20 MHz BW 100% load and 20 MHz BW
Overvoltage Protection ⁽¹⁾		None		%	See Overvoltage Protection application note.
Overcurrent Protection	105		150	%	At Vin nominal, restart time 700ms ±300ms
Overtemperature Protection ⁽²⁾	102		107	°C	Baseplate temp. with 2°C to 5°C hysteresis
Remote Sense			0.5	V	Total voltage compensation
Load Regulation			±1	%	Vout nominal
Load Step Output Transient			±3	%	Vout nominal 75-25% or 25-75% load changes
Load Step Recovery			500	µs	Within 1% of Vout nom
Line Regulation			±1	%	Vout nominal at 15.5-40 Vin
Line Step Output Transient			±3	%	Vout nominal at 15.5-40 Vin
Line Step Recovery			500	µs	Time for Vout to recover to 1% of Vout nom, with line step 15.5-40 Vin
Maximum Output Capacitance			300 x Iout max	µF	
Start Up Time		70		ms	See fig. 17 to 20

1. Overvoltage protection can be removed by factory, add suffix "-NV" to the part number, e.g. MTC0528S05-NV.

2. For the option without overtemperature protection add suffix "-NT" to the part number, e.g. MTC0528S05-NT.

Models & Ratings

Power	Output Voltage			Output Current	Input Current ⁽³⁾		Efficiency	Model Number
	Nominal	Min ⁽¹⁾	Max ⁽¹⁾		No Load	Full Load		
4 W	3.3 VDC	3.3 VDC	4.0 VDC	1.21 A	0.03 A	0.18 A	80%	MTC0528S3V3
4 W	5 VDC	4.0 VDC	6.0 VDC ⁽²⁾	0.80 A	0.02 A	0.19 A	77%	MTC0528S05
5 W	12 VDC	9.0 VDC	13.8 VDC	0.42 A	0.02 A	0.23 A	78%	MTC0528S12
5 W	15 VDC	11.0 VDC	17.0 VDC	0.33 A	0.01 A	0.23 A	77%	MTC0528S15
5 W	28 VDC	20.0 VDC	30.0 VDC	0.18 A	0.02 A	0.22 A	78%	MTC0528S28

1. Indicates maximum and minimum voltage adjustment (Maximum includes Remote Sense adjustment).

2. The full trim range is not available when the input is <15.5V.

3. Vin = 28 VDC.

General Specifications

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Efficiency				%	See models table and performance graphs
Isolation Voltage			1500	VDC	Input to output
			1000	VDC	Input to case
			500	VDC	Output to case
Switching Frequency		450		kHz	
Frequency Synch.	450		550	kHz	See note.
MTBF	See MTBF Calculations				
Inhibit	On = TTL High or open circuit; Off = TTL Low or short circuit				
Rth Case - Ambient	Output Voltage			Rth Case - Ambient	
	3.3 V			26.4 °C/W	
	5 V			24.3 °C/W	
	12 V			22.0 °C/W	
	15 V			21.1 °C/W	
	28 V			22.0 °C/W	

Note. Control signal needs to be TTL 0-5 VDC square wave. The trigger is the falling edge.

Environmental

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Operating Case Temperature	-40		+100	°C	Baseplate temperature
Extended Temperature Range	-55		+100	°C	Baseplate temperature. See note.
Storage Temperature	-55		+125	°C	
Humidity			95	%	Relative humidity
Salt Atmosphere			48	Hrs	MIL-STD 810E Method 509.3
Altitude			70000	Ft	MIL-STD 810D Method 500.2
Shock			100	g	MIL-STD 810D Method 516.3 crash hazard for ground equipment
Vibration	5		500	Hz	MIL-STD 810D Method 514.3 basic transportation
Bump			40	g	2000 bumps in each axes MIL-STD 810D Method 516.3 crash hazard

Note. For -55 °C extended operating range, add suffix '-LT' to the part number. e.g. MTC1528S05-LT.

Electromagnetic Compatibility

EMC (see note 2)	Standard	Test Level	Criteria	Notes & Conditions
Conducted Emissions	MIL-STD-461E/F/G	CE101/CE102		MTF50 module is required
Immunity	MIL-STD-1275A-E	Spikes Surges Ripple	±250 V for 100 µs 100 V for 50 ms (see note 1) 14 VAC pk-pk	MTF50 module is required
	MIL-STD-704A	600 V input transient	10µs 50Ω source impedance	MTF50 module is required
	MIL-STD-704B-F		50 V for 10 ms	
Conducted Susceptibility	MIL-STD-461E/F/G	CS101, CS114, CS115, CS116		MTF50 module is required

Note.

1. 0.5 Ω source impedance

2. For compliance to D0160D, DEF-STAN-59-41 and GAM-EG13B please contact sales

Safety Approvals

Standard	Category
CE	LVD


MTBF Calculations

Temperature / Environment	Ground Mobile - GM	Airbourne Inhabited Cargo - AIC	Airbourne Inhabited Fighter - AIF
20 °C	1450849 Hrs	1312752 Hrs	671079 Hrs
40 °C	1000720 Hrs	900223 Hrs	457913 Hrs
60 °C	671113 Hrs	606117 Hrs	315096 Hrs
80 °C	423968 Hrs	388474 Hrs	214125 Hrs
100 °C	246343 Hrs	230675 Hrs	140070 Hrs

Synchronization

The recommended level for the synchronization is a TTL signal but slightly higher levels may be used without a problem. However the maximum positive level should not exceed 5V. The ideal synchronization signal is a pulse of minimum of 200ns and low and high levels of <0.8V and 4V to 5V respectively within a frequency range of 450kHz to 500kHz. The trigger is the falling edge of the signal and the impedance of the sync pin is >10kohm. If the synchronization feature is not required the sync pin is recommended to be connected to ground to prevent any abnormal interference.

Overcurrent Protection

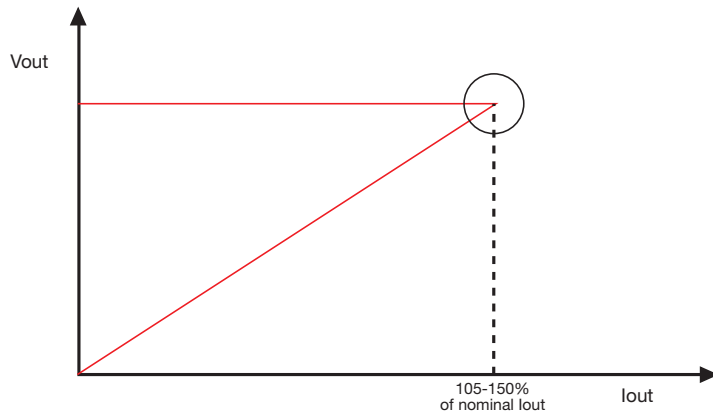

MTC0528SXX has a trip and restart (hiccup mode) protection which will turn off the converter after reaching the limit between 105% to 150% of full load. The converter will attempt to restart after approximately 700ms.

Figure 1. Overcurrent Protection

Remote Sensing

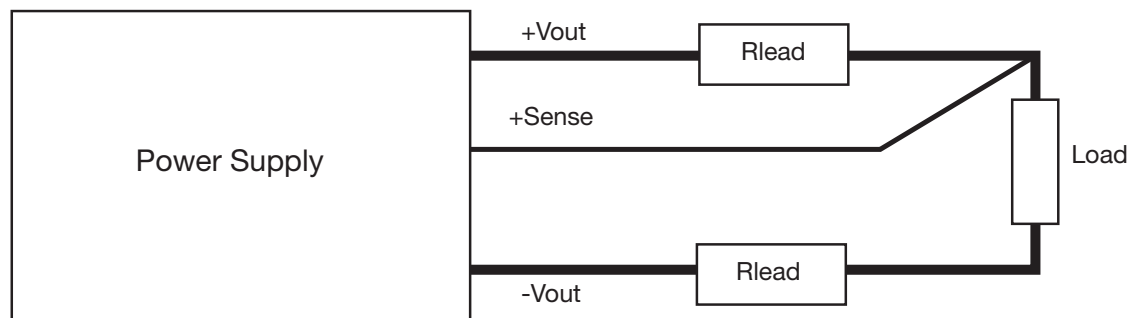


Figure 2. MTC05 - Remote Sense Connection Diagram

Notes.

1. To use the remote sense connect +Sense pin to +Vout.
2. When remote sense is not in use leave not connected or connect locally to +Vout.

Voltage Trim

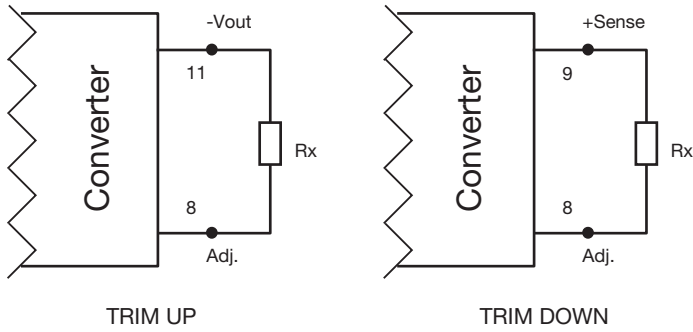


Figure 3. MTC05 - Trim Connections

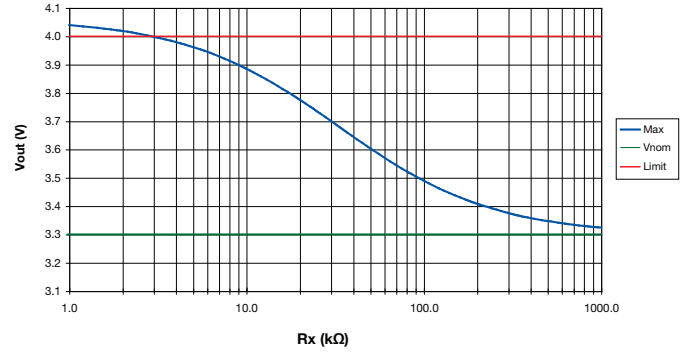


Figure 4. MTC0528S3V3 - Max and Min Adjustment

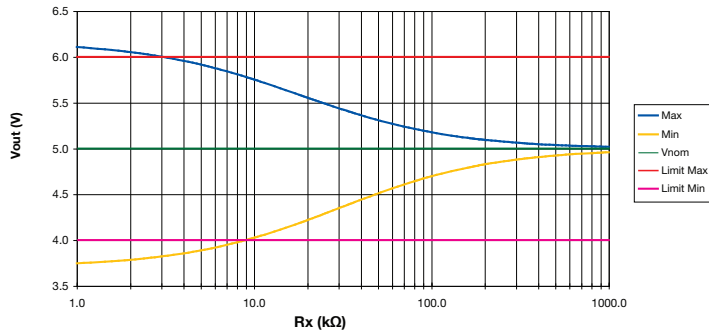


Figure 5. MTC0528S05 - Max and Min Adjustment

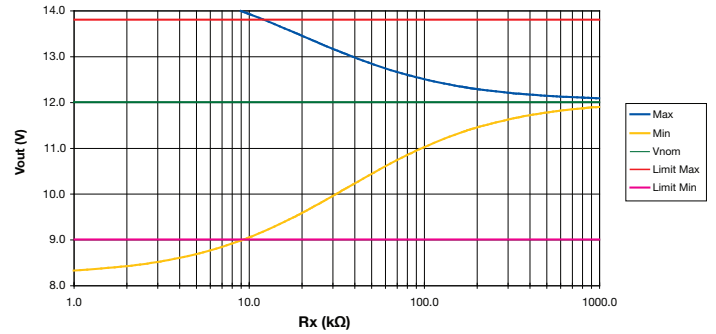


Figure 6. MTC0528S12 - Max and Min Adjustment

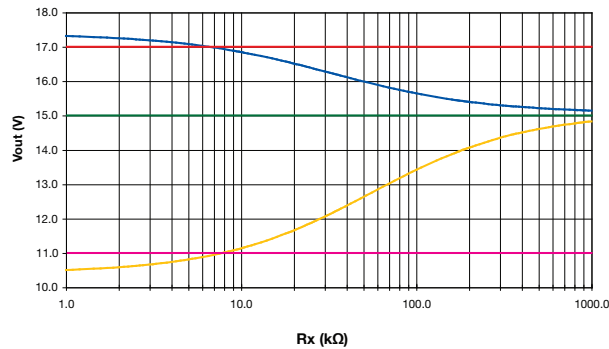


Figure 7. MTC0528S15 - Max and Min Adjustment

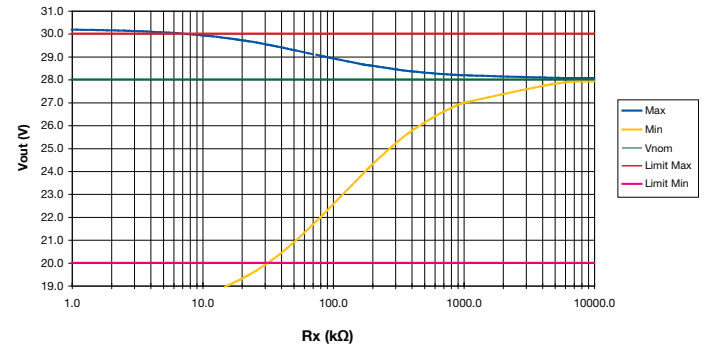


Figure 8. MTC0528S28 - Max and Min Adjustment

Notes.

1. When adjusting the output voltage do not go above the specified output voltage range (refer to tables) as the Over Voltage Protection may be triggered when fitted.
2. When adjusting the output voltage do not go below the specified voltage range (refer to tables) as input and output characteristics can not be guaranteed.
3. When not in use leave Adj. pin not-connected.

EMC Performance Curves

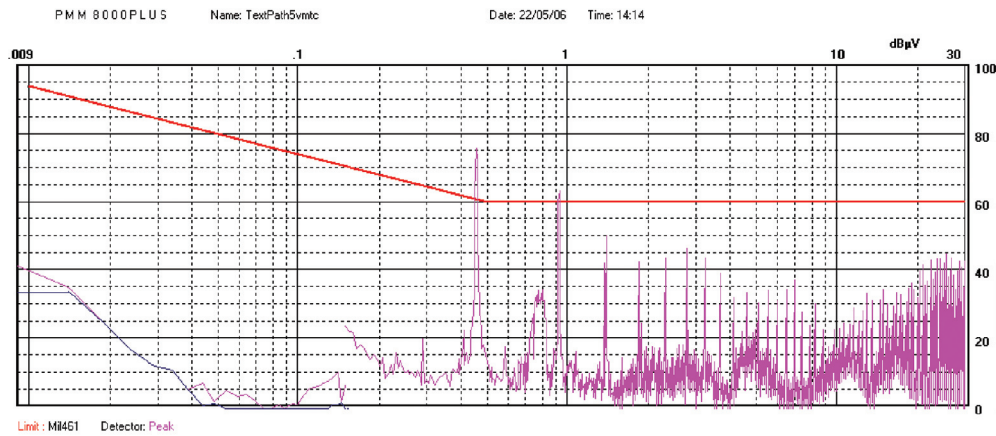


Figure 9. MTC0528S05 without a filter

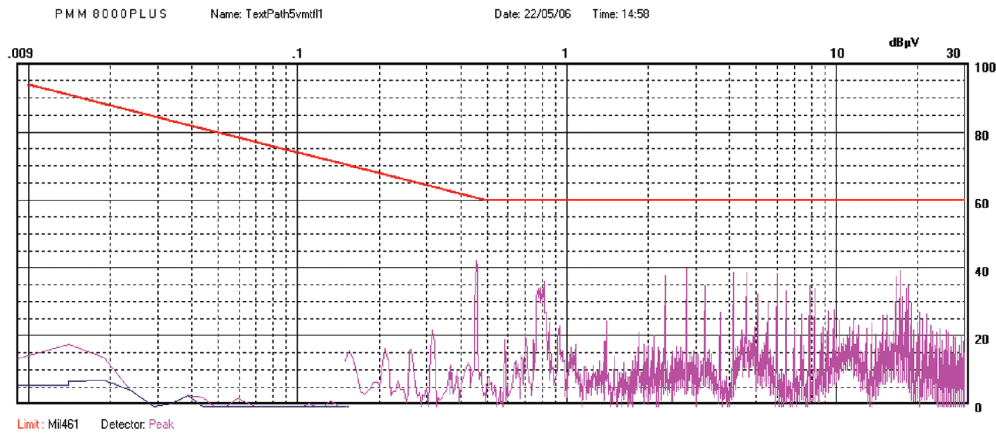


Figure 10. MTC0528S05 with MTF50 filter

EMC Filter Connection Diagram

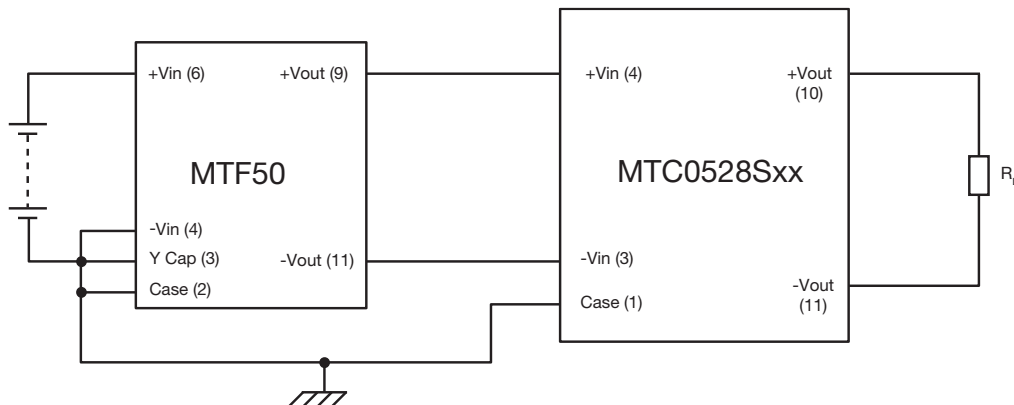


Figure 11. MTC05 - EMC Filter connection diagram

Parallel Configuration

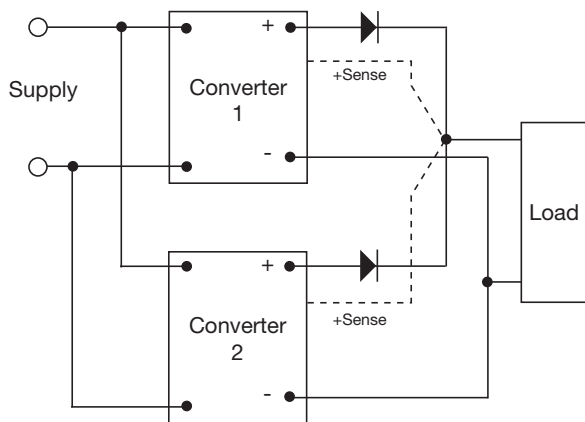


Figure 12. Parallel configuration suitable for redundant operation

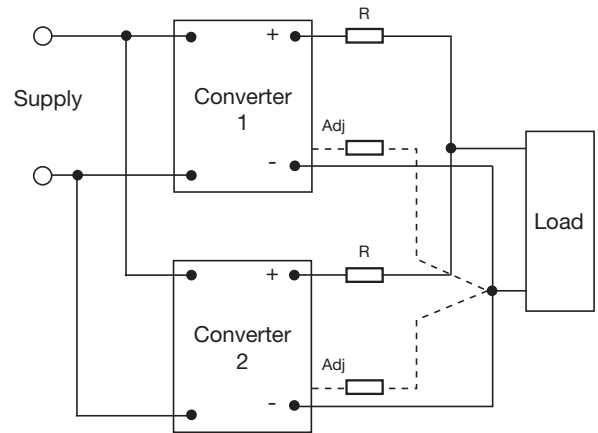


Figure 13. Parallel configuration for current sharing

Notes.

1. Up to 3 converters to share within 80% max power;
2. To calculate the resistor (R) for the current sharing use the formula: $R = (V_{out\ nom} (V) \times output\ set\ tolerance\ (\%)) / (I_{out\ nom} (A) \times current\ share\ (\%))$, e.g. MTC0528S05 will be: $R = (5V \times 4\%) / (0.8A \times 50\%) = 500m\Omega$
3. The adjust pin can be used to tune V_{out} to achieve max of 1% tolerance which helps to achieve better current sharing and keeps the resistor (R) value lower.

Overvoltage Protection

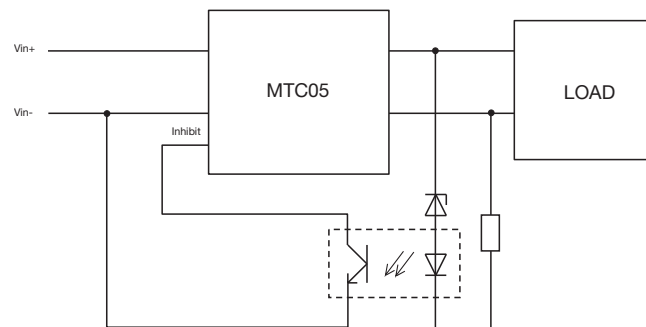


Figure 15. Overvoltage Protection - Trip & Restart

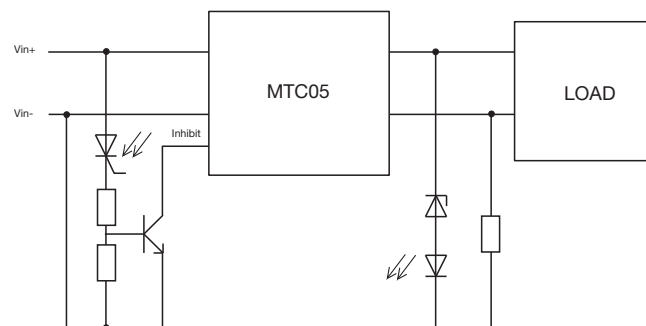


Figure 14. Overvoltage Protection - Latched

Efficiency

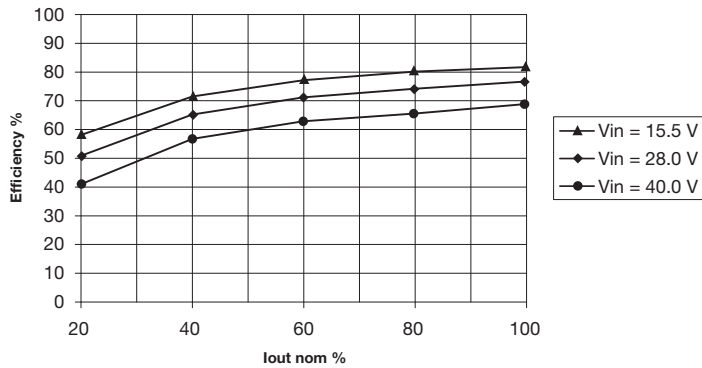


Figure 15. Typical efficiency for MTC0528S05

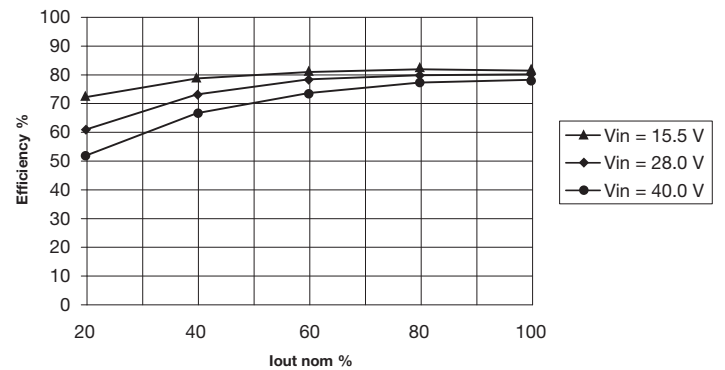


Figure 16. Typical efficiency for MTC0528S28

Start Up Time

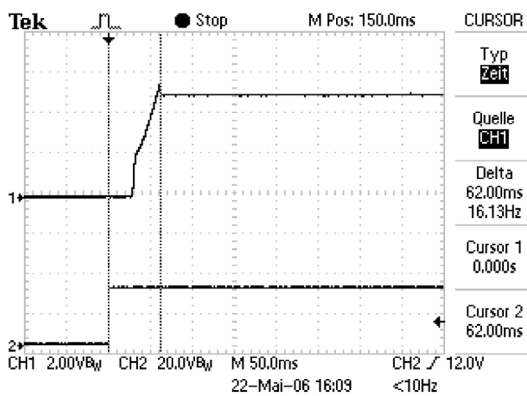


Figure 17. Start up time for MTC0528S05 with full resistive load - 62 ms

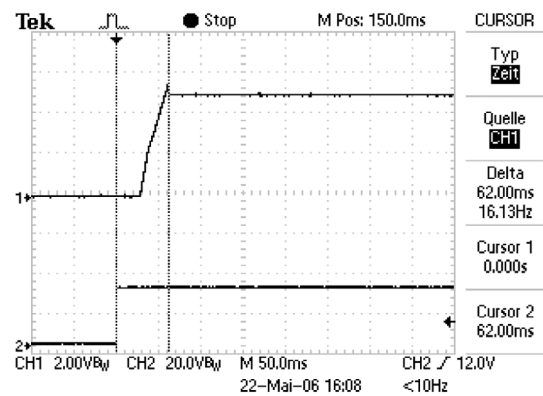


Figure 18. Start up time for MTC0528S05 at full load and 240 μ F - 62 ms

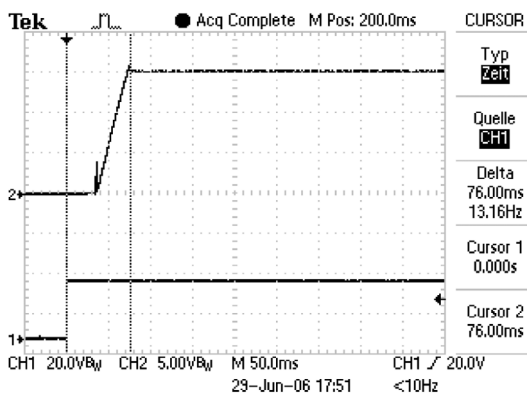


Figure 19. Start up time for MTC0528S28 with full resistive load - 76 ms


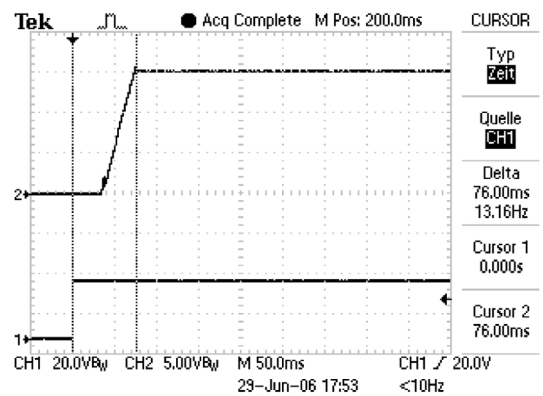


Figure 20. Start up time for MTC0528S28 at full load and 99 μ F - 76 ms

Mechanical Details

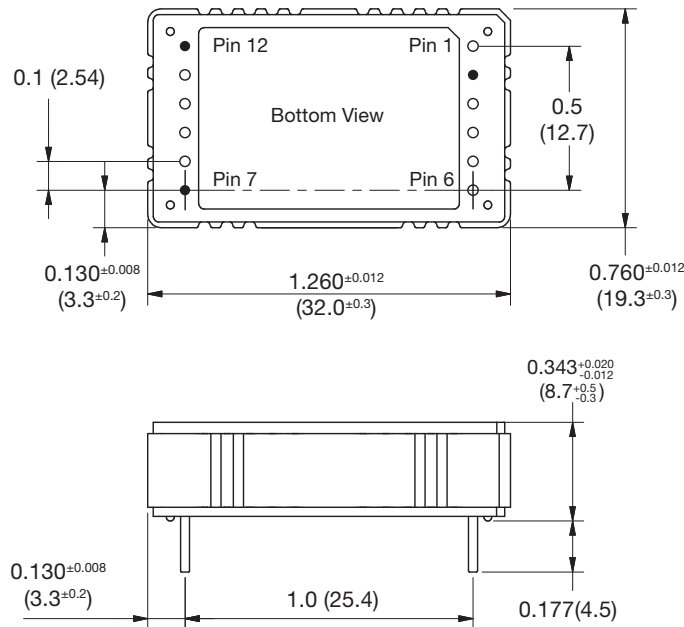

MTC05 Connections	
Pin	Function
1	Case
2	No Pin
3	- Vin
4	+ Vin
5	Synchronisation
6	Inhibit
7	No Pin
8	Adjust
9	+Sense
10	+Vout
11	-Vout
12	No Pin

Notes

1. Dimensions are in inches (mm)
2. Tolerance: ± 0.02 inches (± 0.5 mm) except where indicated
3. Weight: 0.02 lb (10 g)
4. Materials & Finish:
 - Pin - Diameter: 0.032 (0.8)
 - Material: Cu Zn30 2.5 μ m Ni
 - Finish: 0.2-0.5 μ m AU (HV 170-200)
 - Case - Material: Aluminium (Al Mg Si 0.5)
 - Finish: Chromated
 - Nameplate - Non-conductive plastic

Soldering.

Wave soldering: 260°C max for 10 s
Soldering gun: 450°C max for 5 s